

# SOLAR GUARDIAN


Enclosed solution – Plug and play

edition 04 : data 22/01/2025




**Bremas Erscè S.p.A.**  
Via Castellazzo 9 – 20040 Cambiago (MI)  
Tel +39 02 95651611 Fax +39 02 95651639  
www.bremas.it info@bremas.it  
ISO 9001 Certified Quality System


**FB150305NUA2MC**

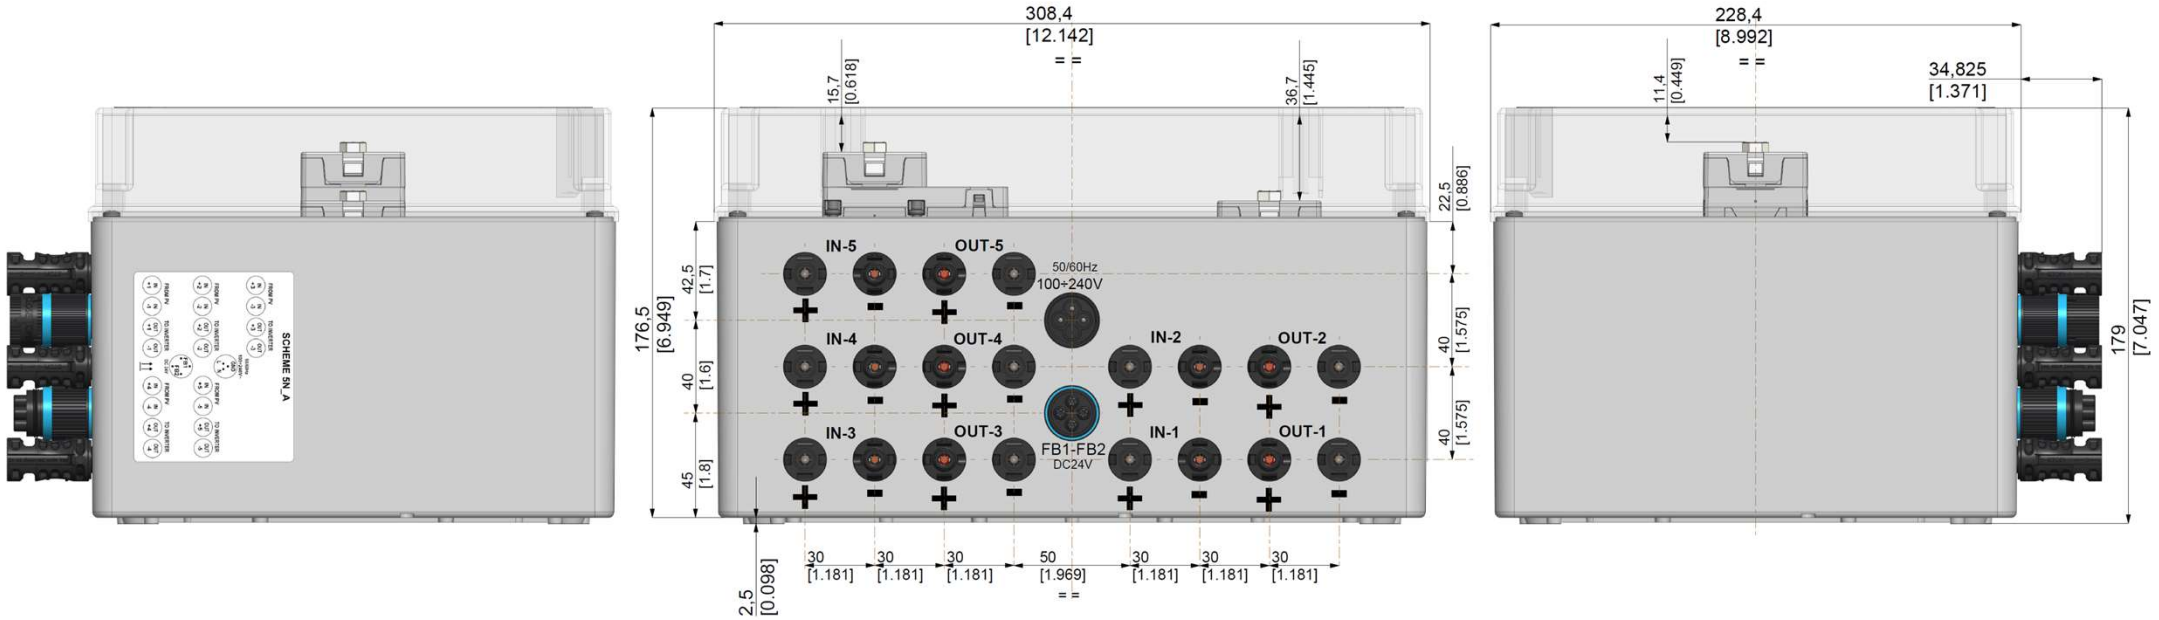

**INTERNAL VIEW**

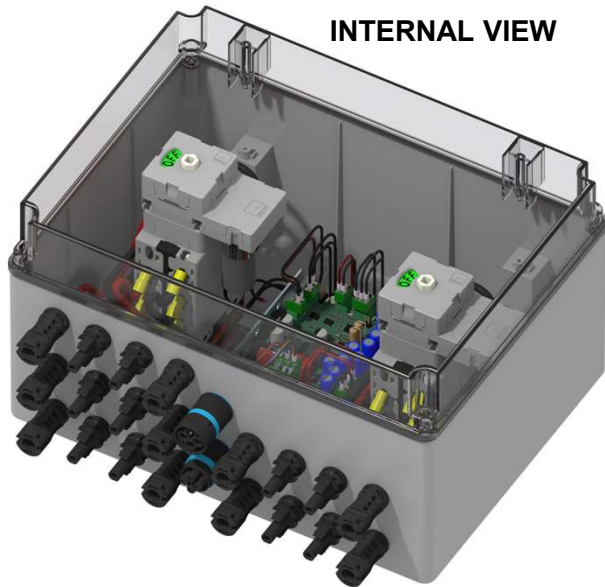

**INTERNAL VIEW**

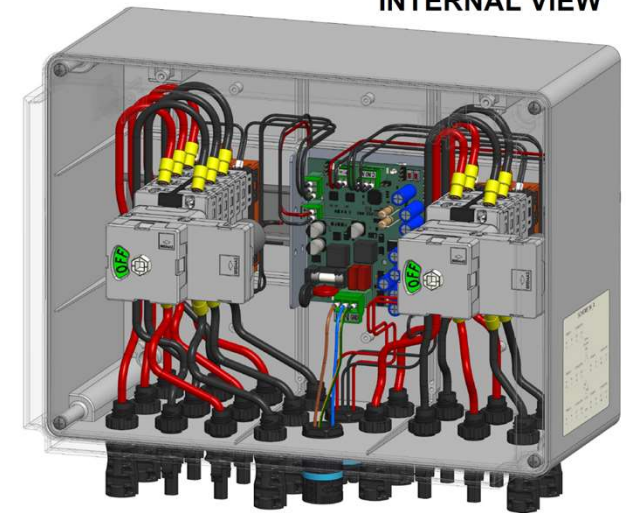

Dimension in mm in [inch]      Dimensioni in mm in [pollici]

# SOLAR GUARDIAN

Enclosed solution – Plug and play

edition 04 : data 22/01/2025







Bremas Erscse S.p.A.  
Via Castellazzo 9 – 20040 Cambiago (MI)  
Tel +39 02 95651611 Fax +39 02 95651639  
www.bremas.it info@bremas.it  
ISO 9001 Certified Quality System



FB150305NUA2MC



## WALL MOUNTING BRACKETS

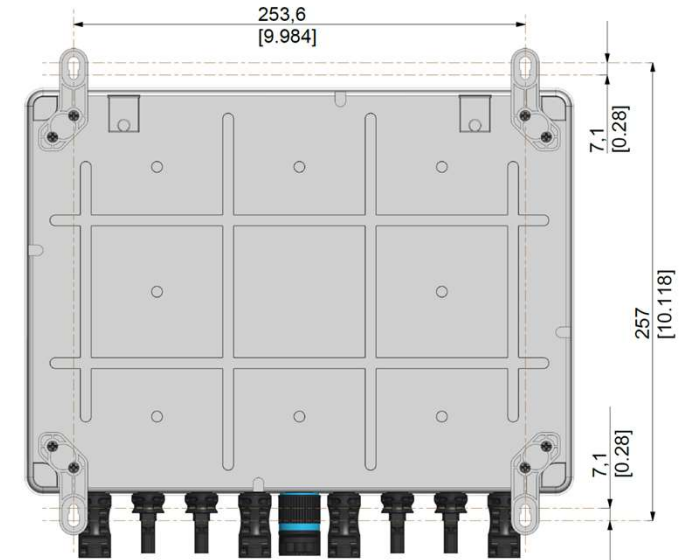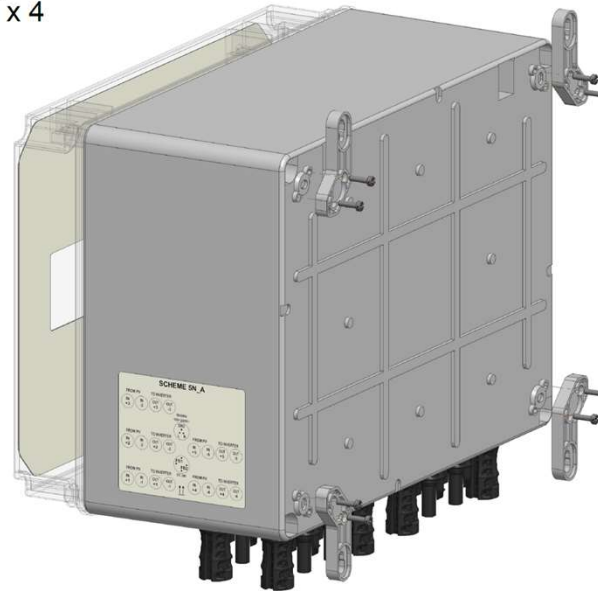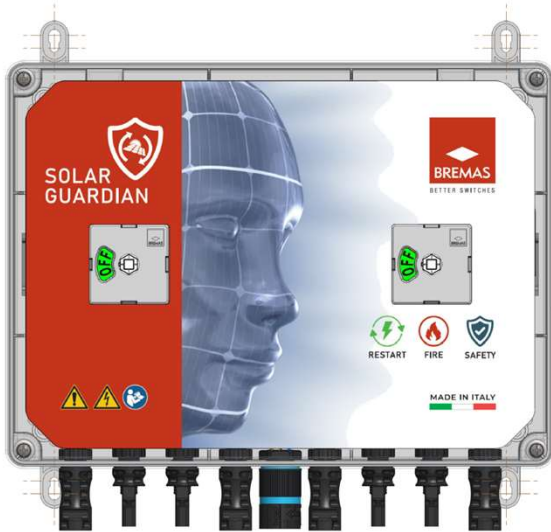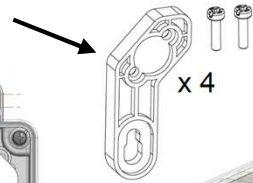

## WALL FIXING HOLES FOR VERTICAL BRACKETS

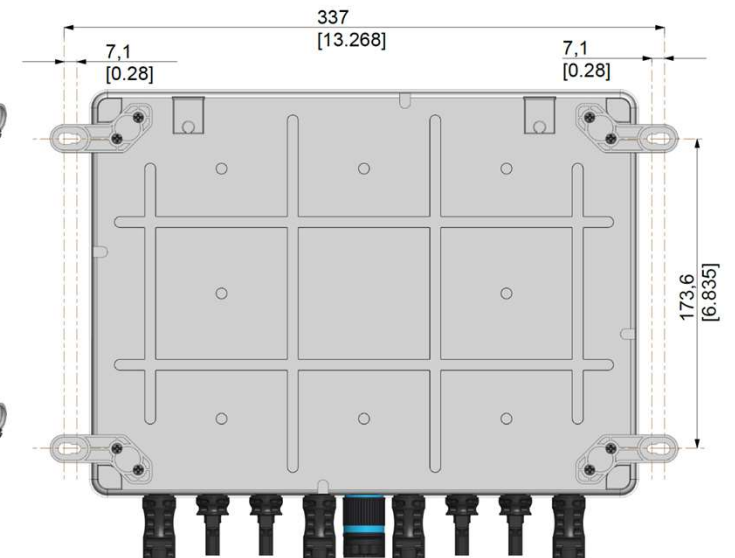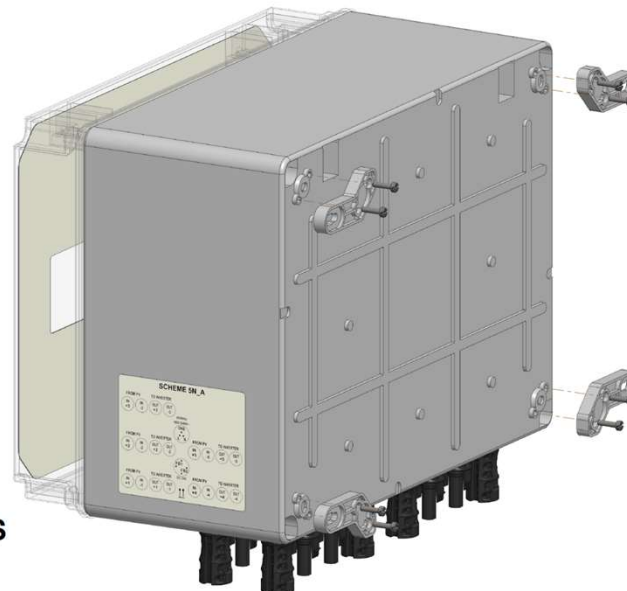

## WALL FIXING HOLES FOR HORIZONTAL BRACKETS

Dimension in mm in [inch]      Dimensioni in mm in [pollici]


## FB150305NUA2MC



Technical data according to IEC 60947-3				
Rated insulation voltage	Ui	V	1500	
Rated impulse withstand voltage	Uimp	kV	8	
Rated thermal current	Ith	A	50	
Power loss per layer at 20 A / 50 A		W	0,2 / 1,25	
DC inputs				
Number of inputs			5	
Utilization category			PV1	PV2
Rated operational current at 1500 V	Ie	A	20	8
Rated operational current at 1300 V	Ie	A	25	10
Rated operational current at 1250 V	Ie	A	30	12
Rated operational current at 1000 V	Ie	A	50	20
Rated operational current at 800 V	Ie	A	-	30
Rated operational current at 700 V	Ie	A	-	40
Short circuit protection				
Rated conditional short-circuit current		kA	5	
Max fuse size for short circuit protection	gPV	A	50	
Rated short-time withstand current (1 s)	Icw	A	780	
Rated short-circuit making capacity	Icm	kA	1,4	
Terminals				
Connection type			MC4 plug-in connector	
Protection degree IEC EN 61439-2				
Solution in box			IP56	
Ambient conditions				
Pollution degree			2	
Operational ambient temperature		°C	-30 ÷ +85	
Storage ambient temperature		°C	-30 ÷ +85	
Damp heat test IEC 60068-2-30			90-100% RH at +55 °C	



### SCHEME 5N\_A

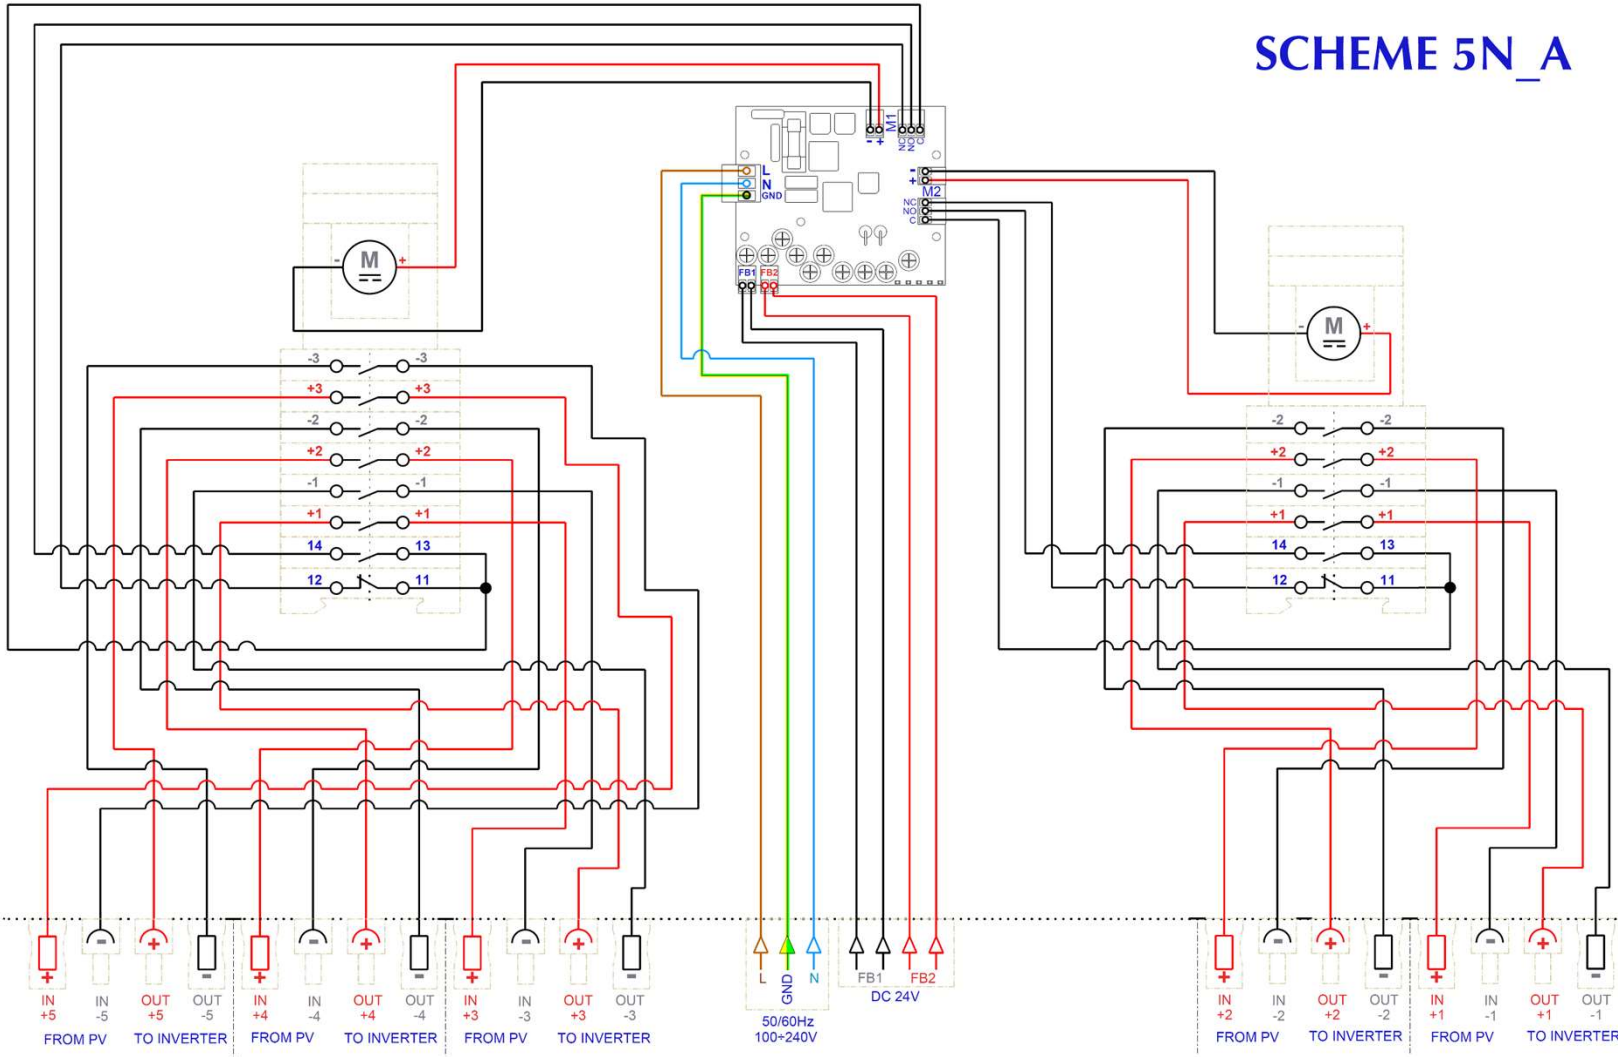

## WIRING DIAGRAM

**SERIAL NUMBER**

## MINI-PLUG-SOCKET CONNECTOR IP66/IP68



### ASSEMBLY ILLUSTRATIONS

<b>Cable</b>	Ø 7.0 – 12.0 mm
<b>Insulator removal (X)</b>	20 mm
<b>Peeling of the conductor (Y)</b>	6 mm

**FIG. 1**

- Remove the insulation from the cable and conductors according to the specifications indicated.
- Insert the cable through the nut, the grommet and the body of the cable gland.
- Check the correct use of the grommet with respect to the cable to be installed in the connector as indicated in Fig. 1b.

Grommet / Adapter	Cable Ø min. - max.	
	◆	★
	2 - 3 - 4 - 5 poles	2 - 3 - 4 - 5 poles (L)
	9.0 mm – 12.0 mm	9.0 mm – 13.5 mm
	7.0 mm – 9.0 mm	7.0 mm – 9.0 mm
	5.0 mm – 7.0 mm	6.0 mm – 7.0 mm

*For cables with a smaller diameter, use the appropriate accessories*

**FIG. 1b**

**0.8 Nm (2 - 3 - 4p Screw)**  
**0.2 Nm (5p Screw)**  
**0.1 Nm (2 - 3 - 4p Piercing)**

**FIG. 2** **Fig. 2a**

- Insert the individual conductors into the connector terminals, making sure they are correctly positioned (Fig. 2a – example of incorrect installation).
- Turn the cable tightening screws clockwise (max. 0.2 Nm) for the 5 poles, (max. 0.8 Nm) for the 2 - 3 - 4 poles Screw and (max. 0.1 Nm) for Piercing versions.

**max. 2.0 Nm**

**FIG. 3** **Fig. 3a**

- Join the strain relief to the connector, then turn it clockwise (max. 2.0 Nm).
- Then, insert the grommet into the cable gland (Fig. 3a – in case of a double grommet, make sure to insert the grommet into the cable gland according to the correct orientation: the indicated ring must be visible).
- Make sure the cable gland is installed and screwed correctly onto the connector (Fig. 3b).

**24 mm** **max. 2.5 Nm**

**FIG. 4**

- Then, join the nut and rotate it clockwise using the quick tightening wrench max. 2.5 Nm. The key will slip when you have reached the optimum torque.
- It is possible to fix the nut also by using common use tools (24 mm – max. 2.5 Nm).

**FIG. 5** **Fig. 5a**

- Make sure the correct orientation of the plug and socket connectors as indicated by the arrow (Fig. 5a).
- Join the pre-wired connectors together, until reaching the limit switch ensuring correct coupling.

**max. 1.0 Nm**

**FIG. 6** **Fig. 6a**

- Manually clockwise rotate the fixing ring of the plug connector until a firm resistance to rotation is reached.
- Alternatively, rotate the ring clockwise with the use of a tool until the torque is reached (max. 1.0 Nm).
- The socket and plug connector is correctly joined and the IP66/IP68 seal is guaranteed even if you notice a slight slot in correspondence with the fixing ring (Fig. 6a).

**FIG. 7**

- It is recommended to use adapters for single conductors or for cables with a smaller diameter than what indicated in the TECHNICAL DATA table.
- TPE and Silicone rubber pads available

<b>Number of poles</b>	2 - 3 - 4 poles
<b>Type of contact</b>	Screw / Piercing
<b>Rated current</b>	17.5A AC (IEC) 15A AC (UL / CSA)
<b>Nominal Tension</b>	500V AC 250V AC (use class II) 600V AC / DC (UL / CSA)
<b>Impulse withstand voltage</b>	4kV
<b>Degree of protection (IP6x)</b>	IP66 / IP68 (30m / 3h)
<b>Conductor section rigid / flexible min. – max.</b>	0.5 mm <sup>2</sup> – 4.0 mm <sup>2</sup> (Screw) 0.5 mm <sup>2</sup> – 1.5 mm <sup>2</sup> (Piercing)
<b>Cable diameter min. – max. (2)</b>	◆ 7.0 mm – 12.0 mm
<b>Connector / gasket materials</b>	PA66 GF UL94 VO / V2 TPE Halogen Free / Silicone Free
<b>Ambient Temperature min. – max.</b>	-40°C / +125°C
<b>Norm</b>	EN61984 UL2238 C22.2 No 182.3