

SOLAR GUARDIAN


Enclosed solution – Plug and play

edition 04 : data 21/01/2025




Bremas Ersce S.p.A.
 Via Castellazzo 9 – 20040 Cambiago (MI)
 Tel +39 02 95651611 Fax +39 02 95651639
 www.bremas.it info@bremas.it
 ISO 9001 Certified Quality System



FB150306NUA2MC

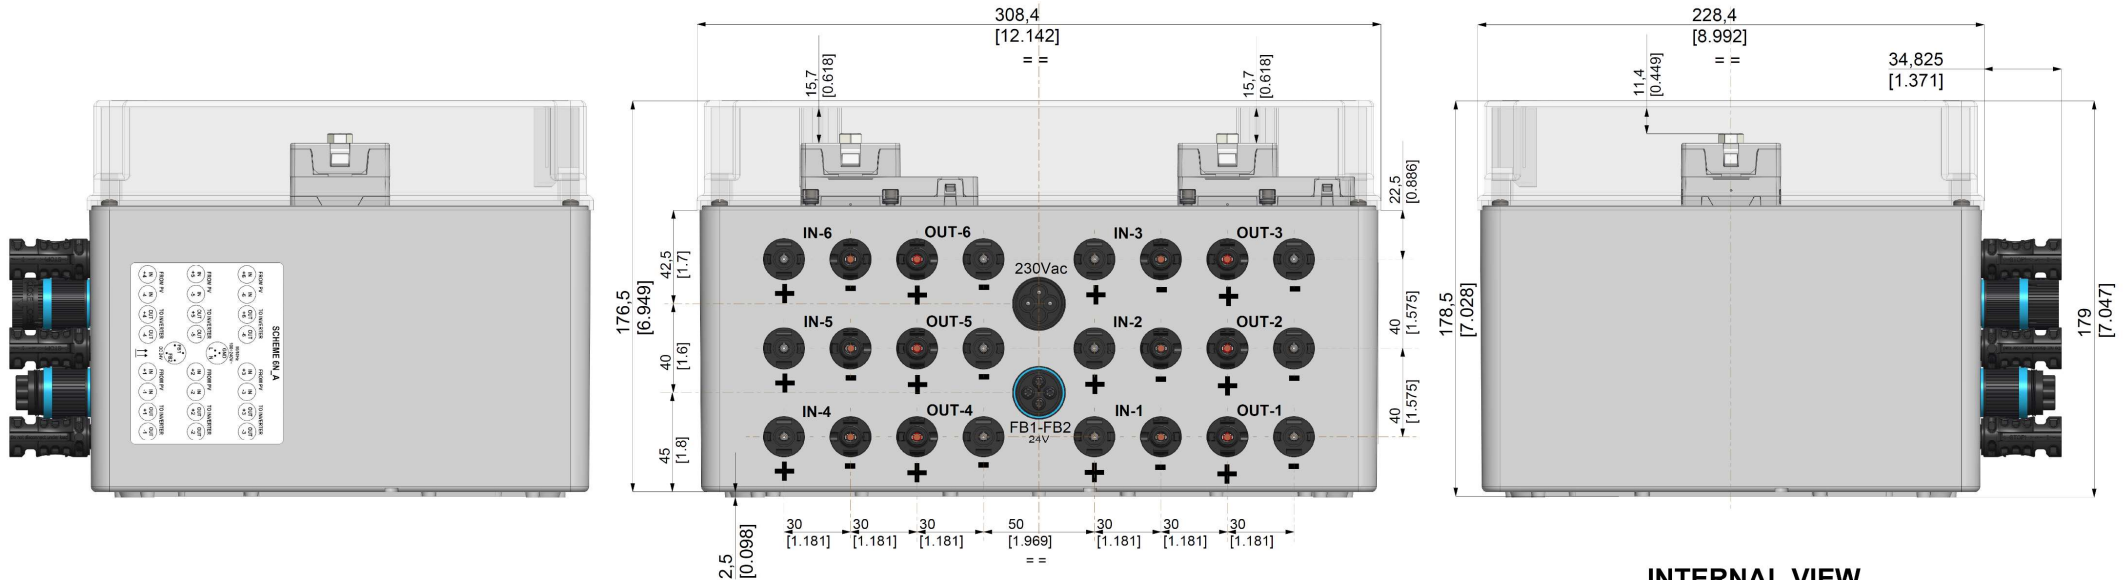

INTERNAL VIEW

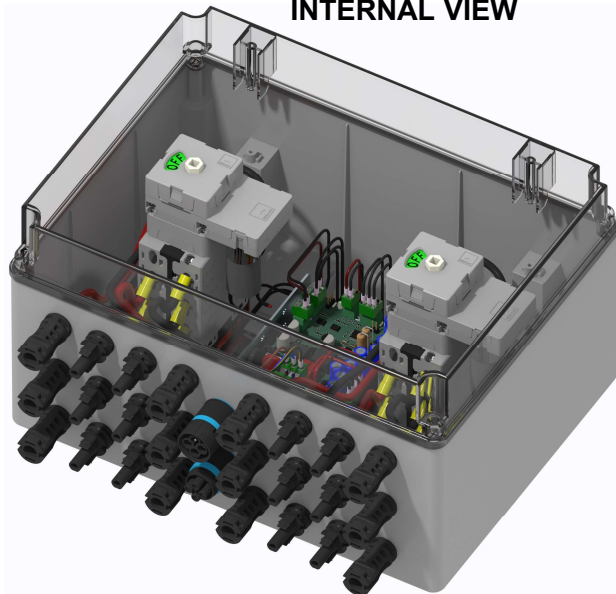





INTERNAL VIEW

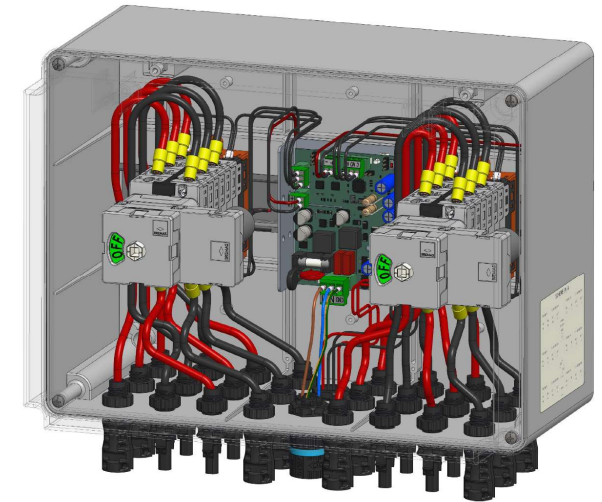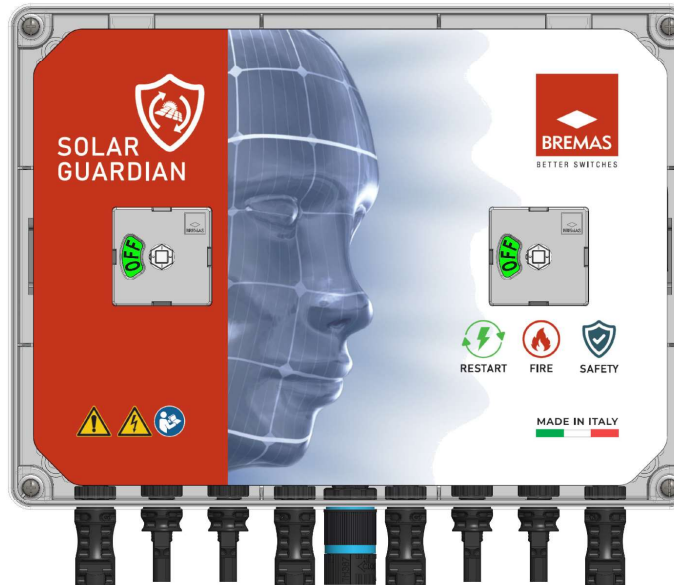




Dimension in mm in [inch] Dimensioni in mm in [pollici]



WALL MOUNTING BRACKETS

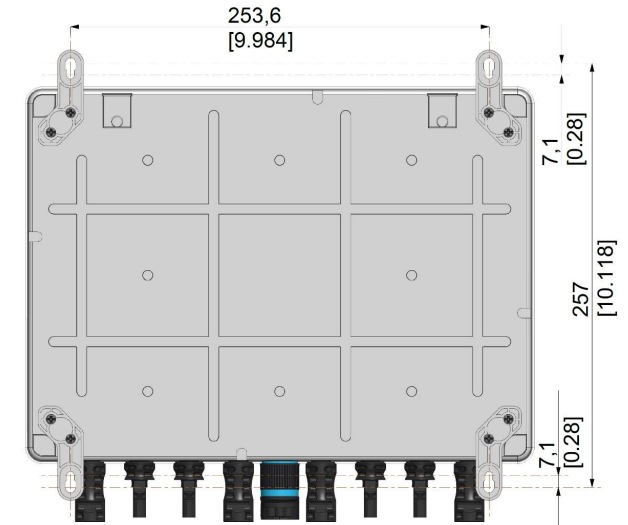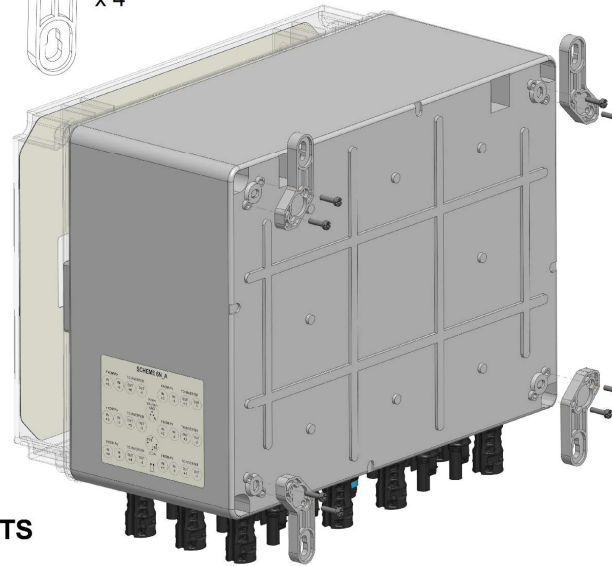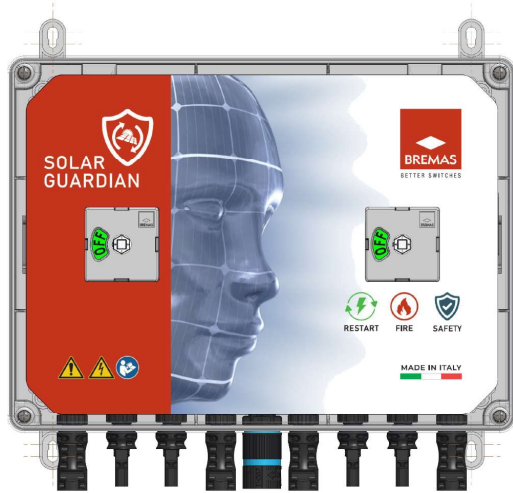

WALL FIXING HOLES FOR VERTICAL BRACKETS

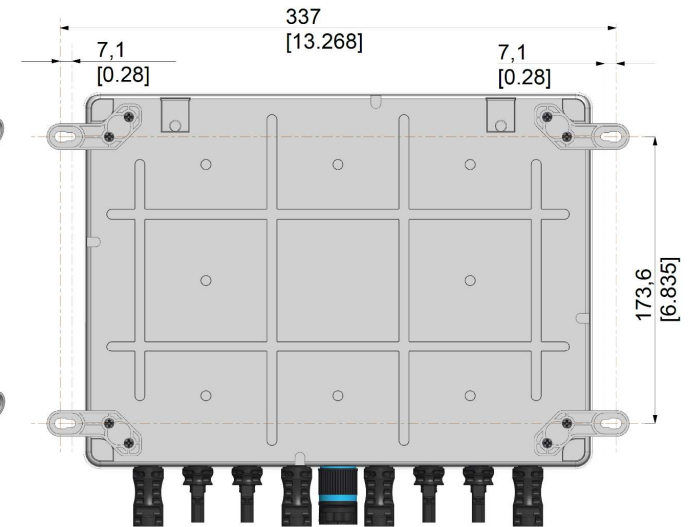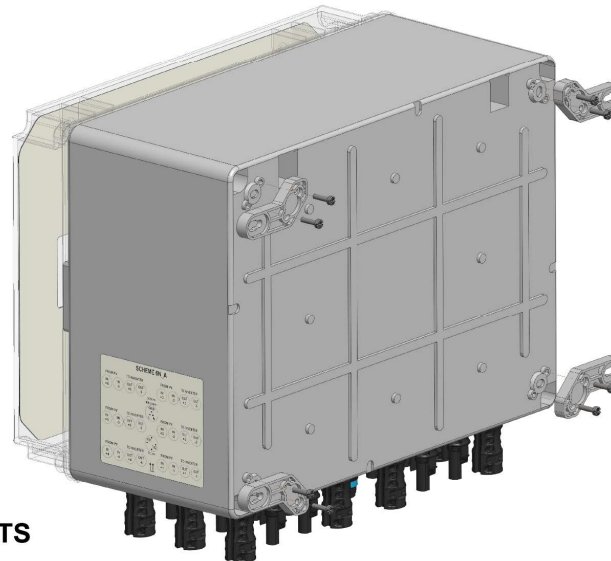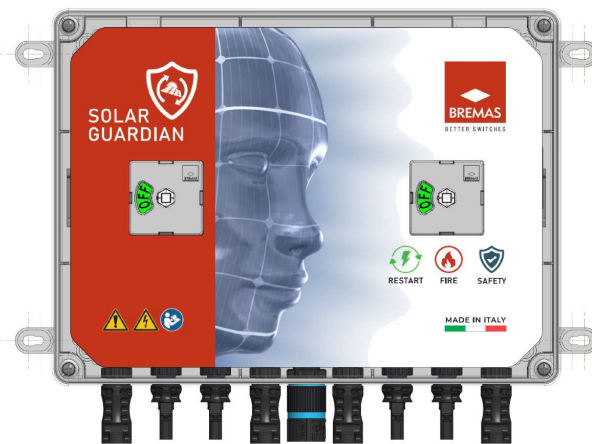

WALL FIXING HOLES FOR HORIZONTAL BRACKETS

Dimension in mm in [inch] Dimensioni in mm in [pollici]


DX150303MUAEDSC



Technical data according to IEC 60947-3			
Rated insulation voltage	Ui	V	1500
Rated impulse withstand voltage	Uimp	kV	8
Rated thermal current	Ith	A	50
Power loss per layer at 20 A / 50 A		W	0,2 / 1,25
DC inputs			
Number of inputs			6
Utilization category			PV1 PV2
Rated operational current at 1500 V	Ie	A	20 8
Rated operational current at 1300 V	Ie	A	25 10
Rated operational current at 1250 V	Ie	A	30 12
Rated operational current at 1000 V	Ie	A	50 20
Rated operational current at 800 V	Ie	A	- 30
Rated operational current at 700 V	Ie	A	- 40
Short circuit protection			
Rated conditional short-circuit current		kA	5
Max fuse size for short circuit protection	gPV	A	50
Rated short-time withstand current (1 s)	Icw	A	780
Rated short-circuit making capacity	Icm	kA	1,4
Terminals			
Connection type			MC4 plug-in connector
Protection degree IEC EN 61439-2			
Solution in box			IP56
Ambient conditions			
Pollution degree			2
Operational ambient temperature		°C	-30 ÷ +85
Storage ambient temperature		°C	-30 ÷ +85
Damp heat test IEC 60068-2-30			90-100% RH at +55 °C



SCHEME 6N_A

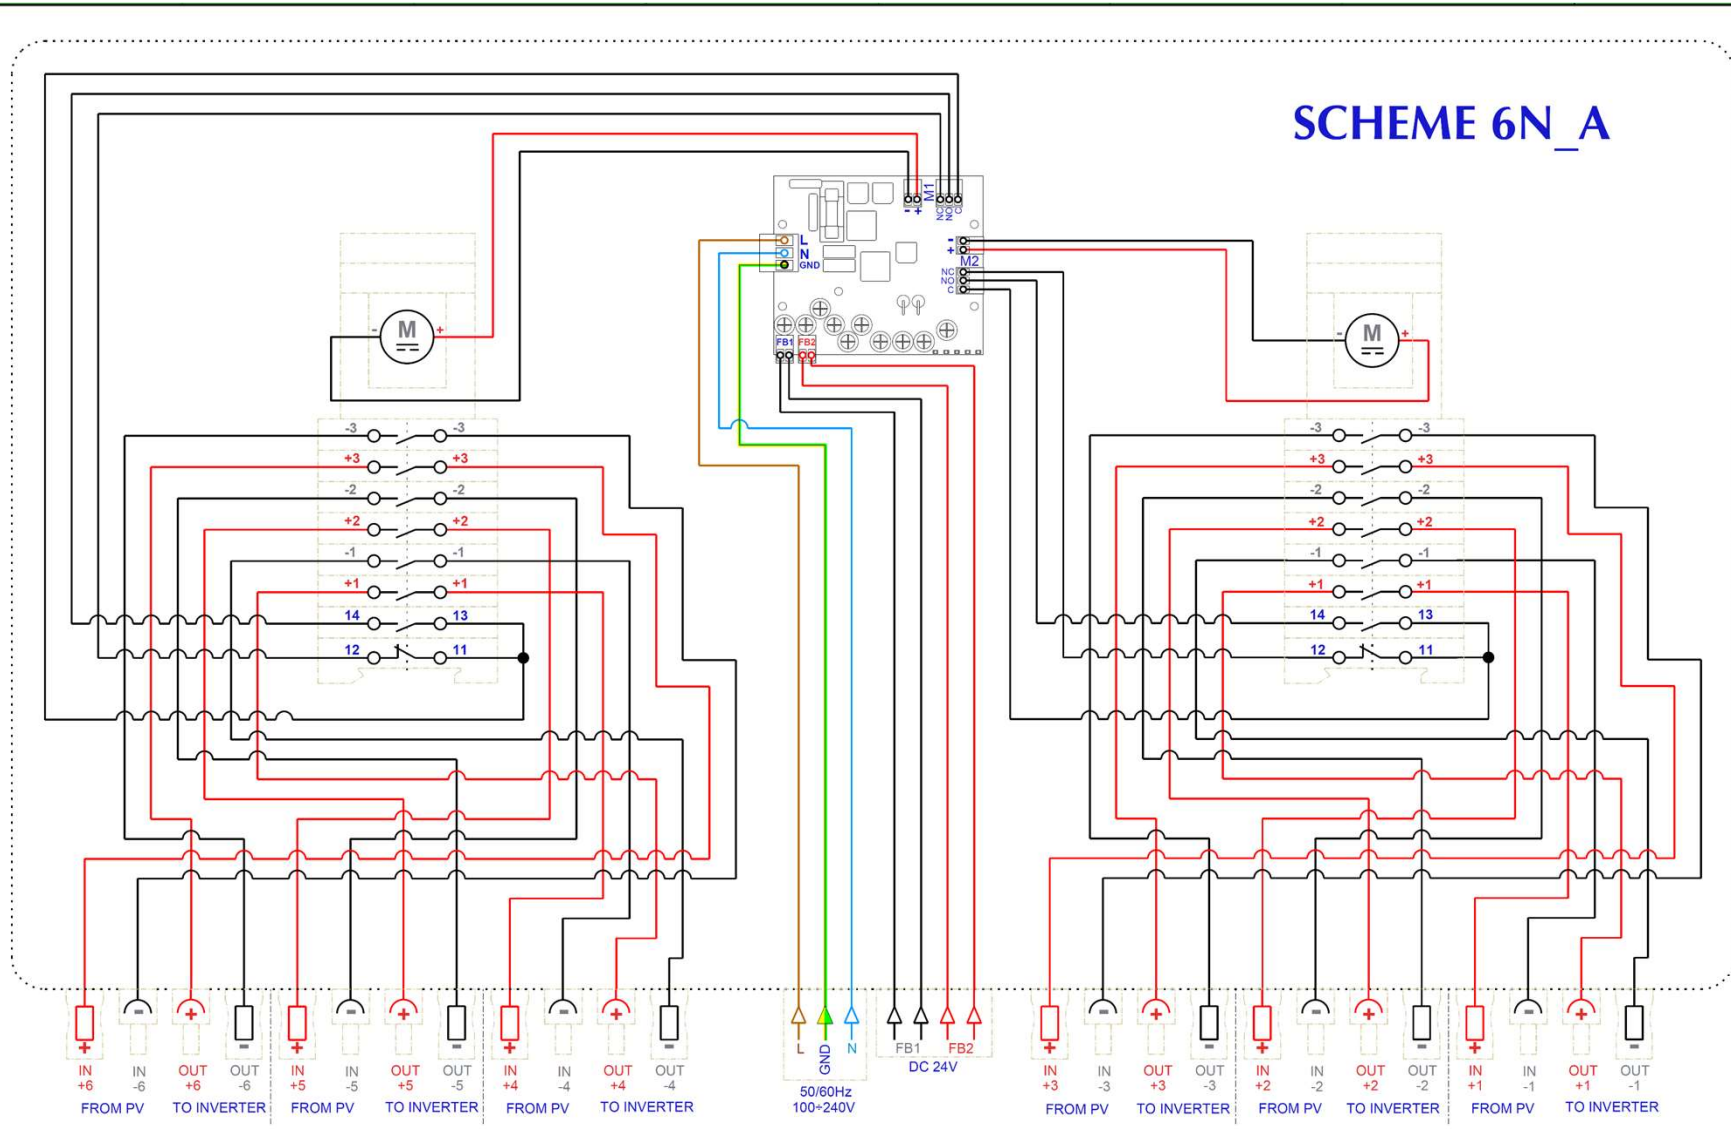

WIRING DIAGRAM

SERIAL NUMBER

©2017 Copyright Bremas Ersce. Subject to change without notice and errors excepted. Data reported in this paper are carefully checked and represent typical values of series production. The descriptions of the device and its applications, contexts of use, details of external controls, information on installation and operation are provided to the best of our knowledge. In any case, this does not mean from the features described it may derive legal responsibilities that extend beyond the "Terms and Conditions of sales" of Bremas Ersce. The customer / user must examine our information and recommendations and the relevant technical regulations before using the products its own purpose.

MINI-PLUG-SOCKET CONNECTOR IP66/IP68



ASSEMBLY ILLUSTRATIONS

Cable	Ø 7.0 – 12.0 mm
Insulator removal (X)	20 mm
Peeling of the conductor (Y)	6 mm

FIG. 1

- Remove the insulation from the cable and conductors according to the specifications indicated.
- Insert the cable through the nut, the grommet and the body of the cable gland.
- Check the correct use of the grommet with respect to the cable to be installed in the connector as indicated in Fig. 1b.

Grommet / Adapter	Cable Ø min. - max.	
	◆	★
	2 - 3 - 4 - 5 poles	2 - 3 - 4 - 5 poles (L)
	9.0 mm – 12.0 mm	9.0 mm – 13.5 mm
	7.0 mm – 9.0 mm	7.0 mm – 9.0 mm
	5.0 mm – 7.0 mm	6.0 mm – 7.0 mm

For cables with a smaller diameter, use the appropriate accessories

FIG. 1b

0.8 Nm (2 - 3 - 4p Screw)
 0.2 Nm (5p Screw)
 0.1 Nm (2 - 3 - 4p Piercing)

FIG. 2 **Fig. 2a**

- Insert the individual conductors into the connector terminals, making sure they are correctly positioned (Fig. 2a – example of incorrect installation).
- Turn the cable tightening screws clockwise (max. 0.2 Nm) for the 5 poles, (max. 0.8 Nm) for the 2 - 3 - 4 poles Screw and (max. 0.1 Nm) for Piercing versions.

max. 2.0 Nm

FIG. 3 **Fig. 3a**

- Join the strain relief to the connector, then turn it clockwise (max. 2.0 Nm).
- Then, insert the grommet into the cable gland (Fig. 3a – in case of a double grommet, make sure to insert the grommet into the cable gland according to the correct orientation: the indicated ring must be visible).
- Make sure the cable gland is installed and screwed correctly onto the connector (Fig. 3b).

24 mm

max. 2.5 Nm

FIG. 4

- Then, join the nut and rotate it clockwise using the quick tightening wrench max. 2.5 Nm. The key will slip when you have reached the optimum torque.
- It is possible to fix the nut also by using common use tools (24 mm – max. 2.5 Nm).

FIG. 5 **Fig. 5a**

- Make sure the correct orientation of the plug and socket connectors as indicated by the arrow (Fig. 5a).
- Join the pre-wired connectors together, until reaching the limit switch ensuring correct coupling.

max. 1.0 Nm

FIG. 6 **Fig. 6a**

- Manually clockwise rotate the fixing ring of the plug connector until a firm resistance to rotation is reached.
- Alternatively, rotate the ring clockwise with the use of a tool until the torque is reached (max. 1.0 Nm).
- The socket and plug connector is correctly joined and the IP66/IP68 seal is guaranteed even if you notice a slight slot in correspondence with the fixing ring (Fig. 6a).

FIG. 7

- It is recommended to use adapters for single conductors or for cables with a smaller diameter than what indicated in the TECHNICAL DATA table.
- TPE and Silicone rubber pads available

Number of poles	2 - 3 - 4 poles
Type of contact	Screw / Piercing
Rated current	17.5A AC (IEC) 15A AC (UL / CSA)
Nominal Tension	500V AC 250V AC (use class II) 600V AC / DC (UL / CSA)
Impulse withstand voltage	4kV
Degree of protection (IP6x)	IP66 / IP68 (30m / 3h)
Conductor section rigid / flexible min. – max.	0.5 mm ² – 4.0 mm ² (Screw) 0.5 mm ² – 1.5 mm ² (Piercing)
Cable diameter min. – max. (2)	7.0 mm – 12.0 mm
Connector / gasket materials	PA66 GF UL94 VO / V2 TPE Halogen Free / Silicone Free
Ambient Temperature min. – max.	-40°C / +125°C
Norm	EN61984 UL2238 C22.2 No 182.3