

Cod. IBM10020220ARMC

Standard and Approvals

- Switch according to IEC 60947-3:2021



Technical features: Enclosure


- ABS double insulation thermoplastic enclosure, UV resistant
- Yellow plate 36x36 mm and red padlockable knob (up to 3 padlocks)
- Switching angle: 90°
- Cover interlock in “ON” position
- Front drive
- IP65 Protection degree
- Fixing enclosure: 4 screws at 60x115 mm or 97x142 mm
- Cover fixing screws tightening torque: 1,4 Nm ±10%
- 8x MC4 connectors (4x each side), model STAUBLI EVO2 reference 32.0347P0001 and 32.0346P0001
- IN+/- and OUT+/- markings

Technical features: DC disconnect switch

- Rated operational current in the enclosure (Ie): 20 A
- Rated operational voltage in the enclosure (Ue): 1000 V
- Rated thermal current (Ith): 50 A
- Rated insulation voltage (Ui): 1500 V
- Switching angle: 90°
- Class V0 self-extinguishing thermoplastic housing
- Assembled with metal shaft to ensure maximum operating reliability



Position



Electrical diagram

Layer	1	2	3	4
Marking	-2	+2	-1	+1
Marking	-2	+2	-1	+1
0 / OFF				
I / ON	X	X	X	X

Enclosed DC Disconnect Switch

IB Series




Bremas Ersce S.p.A.
Via Castellazzo 9 – 20040 Cambiago (MI)
Tel +39 02 95651611 Fax +39 02 95651639
www.bremas.it info@bremas.it
ISO 9001 Certified Quality System

Cod. IBM10020220ARMC

Dimensions

measures in mm [in]

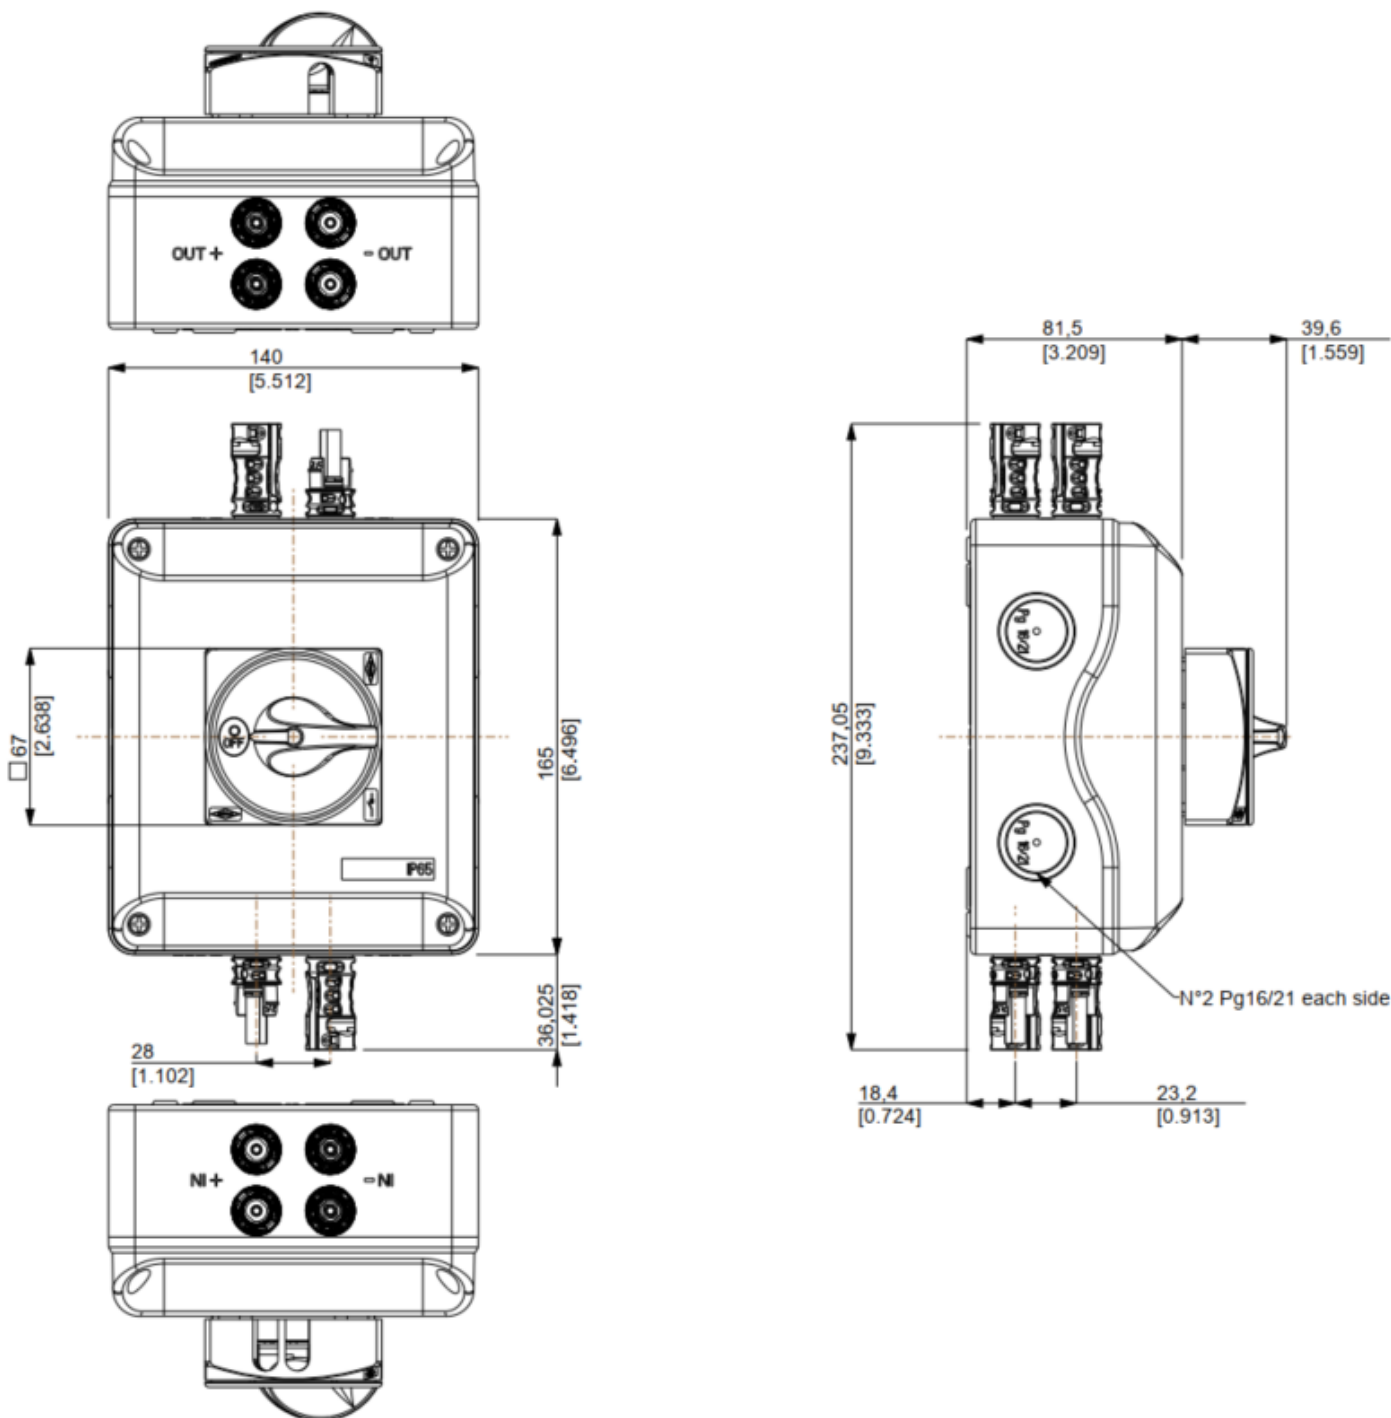

Enclosed DC Disconnect Switch

IB Series



Bremas Erscse S.p.A.
Via Castellazzo 9 – 20040 Cambiago (MI)
Tel +39 02 95651611 Fax +39 02 95651639
www.bremas.it info@bremas.it
ISO 9001 Certified Quality System

IBM10020220ARMC

Technical data of the DC disconnect switch

Technical data according to IEC 60947-3:2021			
Utilization category			PV1 (DC-21B) PV2
Rated operational voltage	Ue	V dc	1100 1100
Rated operational current	Ie	A dc	12 5
Rated operational voltage (second rating)	Ue	V dc	1000 1000
Rated operational current (second rating)	Ie	A dc	20 10
Rated operational voltage (third rating)	Ue	V dc	750 750
Rated operational current (third rating)	Ie	A dc	32 18
Rated operational voltage (fourth rating)	Ue	V dc	700 700
Rated operational current (fourth rating)	Ie	A dc	40 20
Rated operational voltage (fifth rating)	Ue	V dc	500 -
Rated operational current (fifth rating)	Ie	A dc	50 -
Rated operational voltage (sixth rating)	Ue	V dc	- -
Rated operational current (sixth rating)	Ie	A dc	- -
Rated thermal current	Ith	A	50
DC Poles		Nr.	4
Rated conditional short-circuit current		kA	5
Rated insulation voltage	Ui	V dc	1500
Rated impulse withstand voltage	Uimp	kV	8
Rated short-time withstand current (1 s)	Icw	A	780
Rated short-circuit making capacity	Icm	kA	1,4
Power loss per layer at 20 A / 50 A		W	0,2 / 1,25
Maximum size of the fuse for the short-circuit protection	gPV	A	50
Ambient conditions			
Pollution degree ins.			2
Operational ambient temperature		°C	-30 ÷ +50
Storage ambient temperature		°C	-30 ÷ +85
Damp heat test IEC 60068-2-30			90-100% RH at +55 °C



Dimensions

