
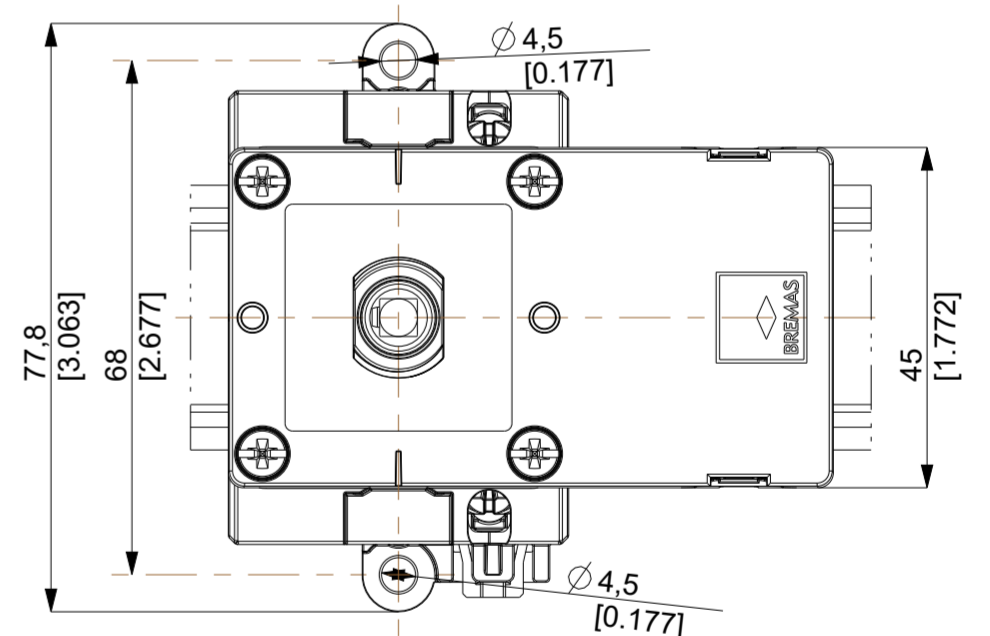
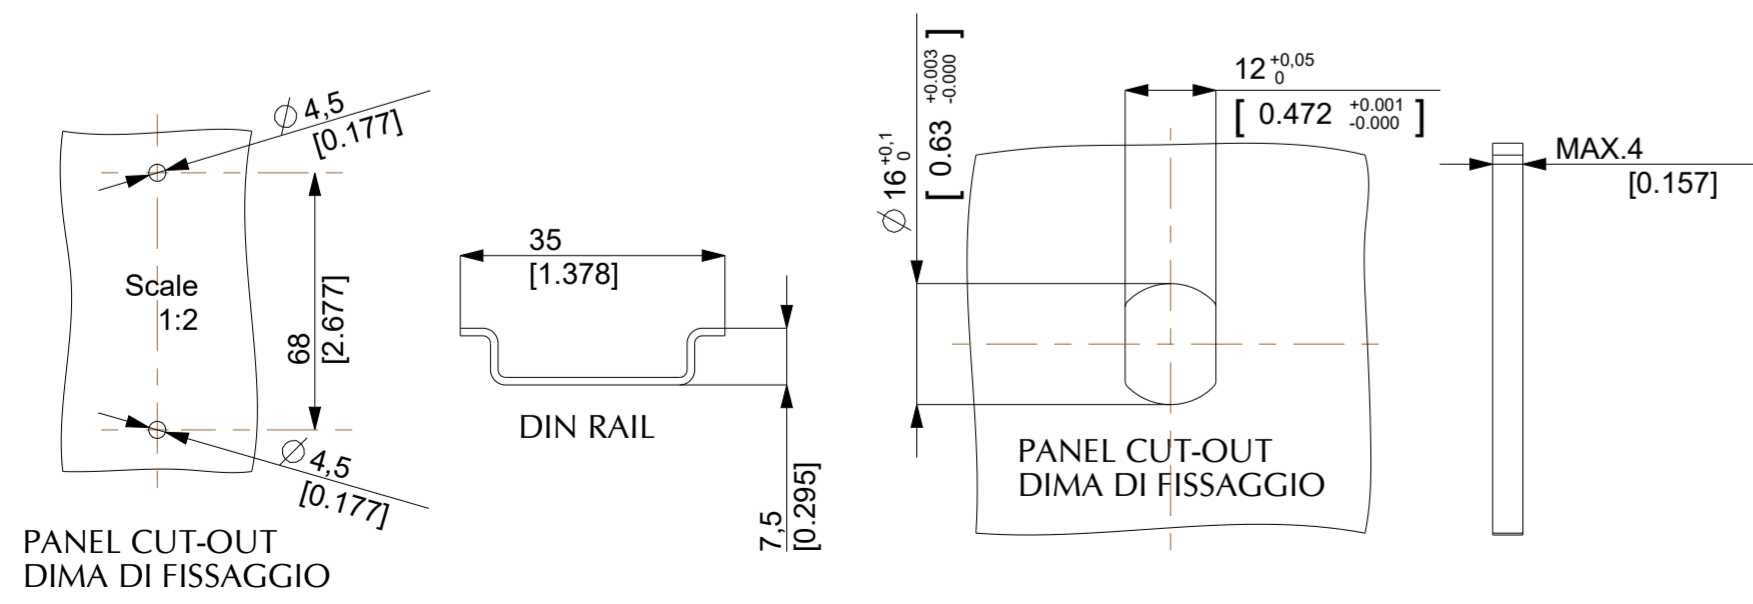
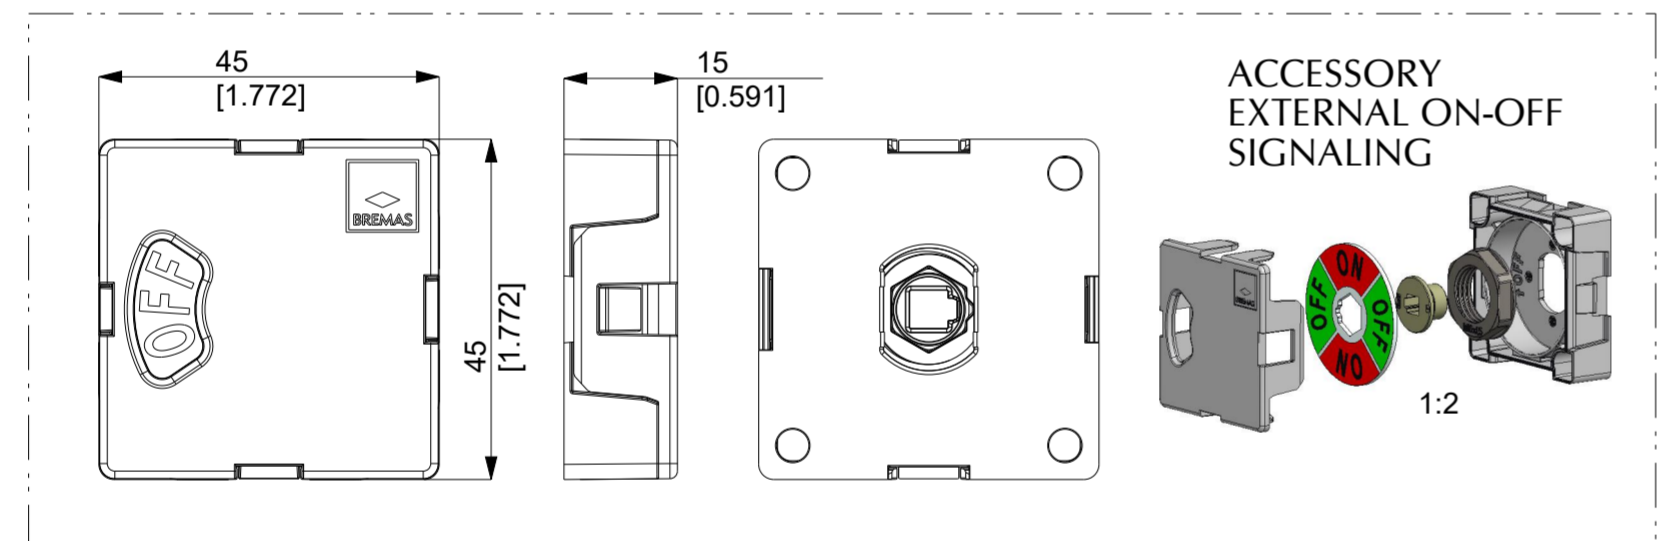
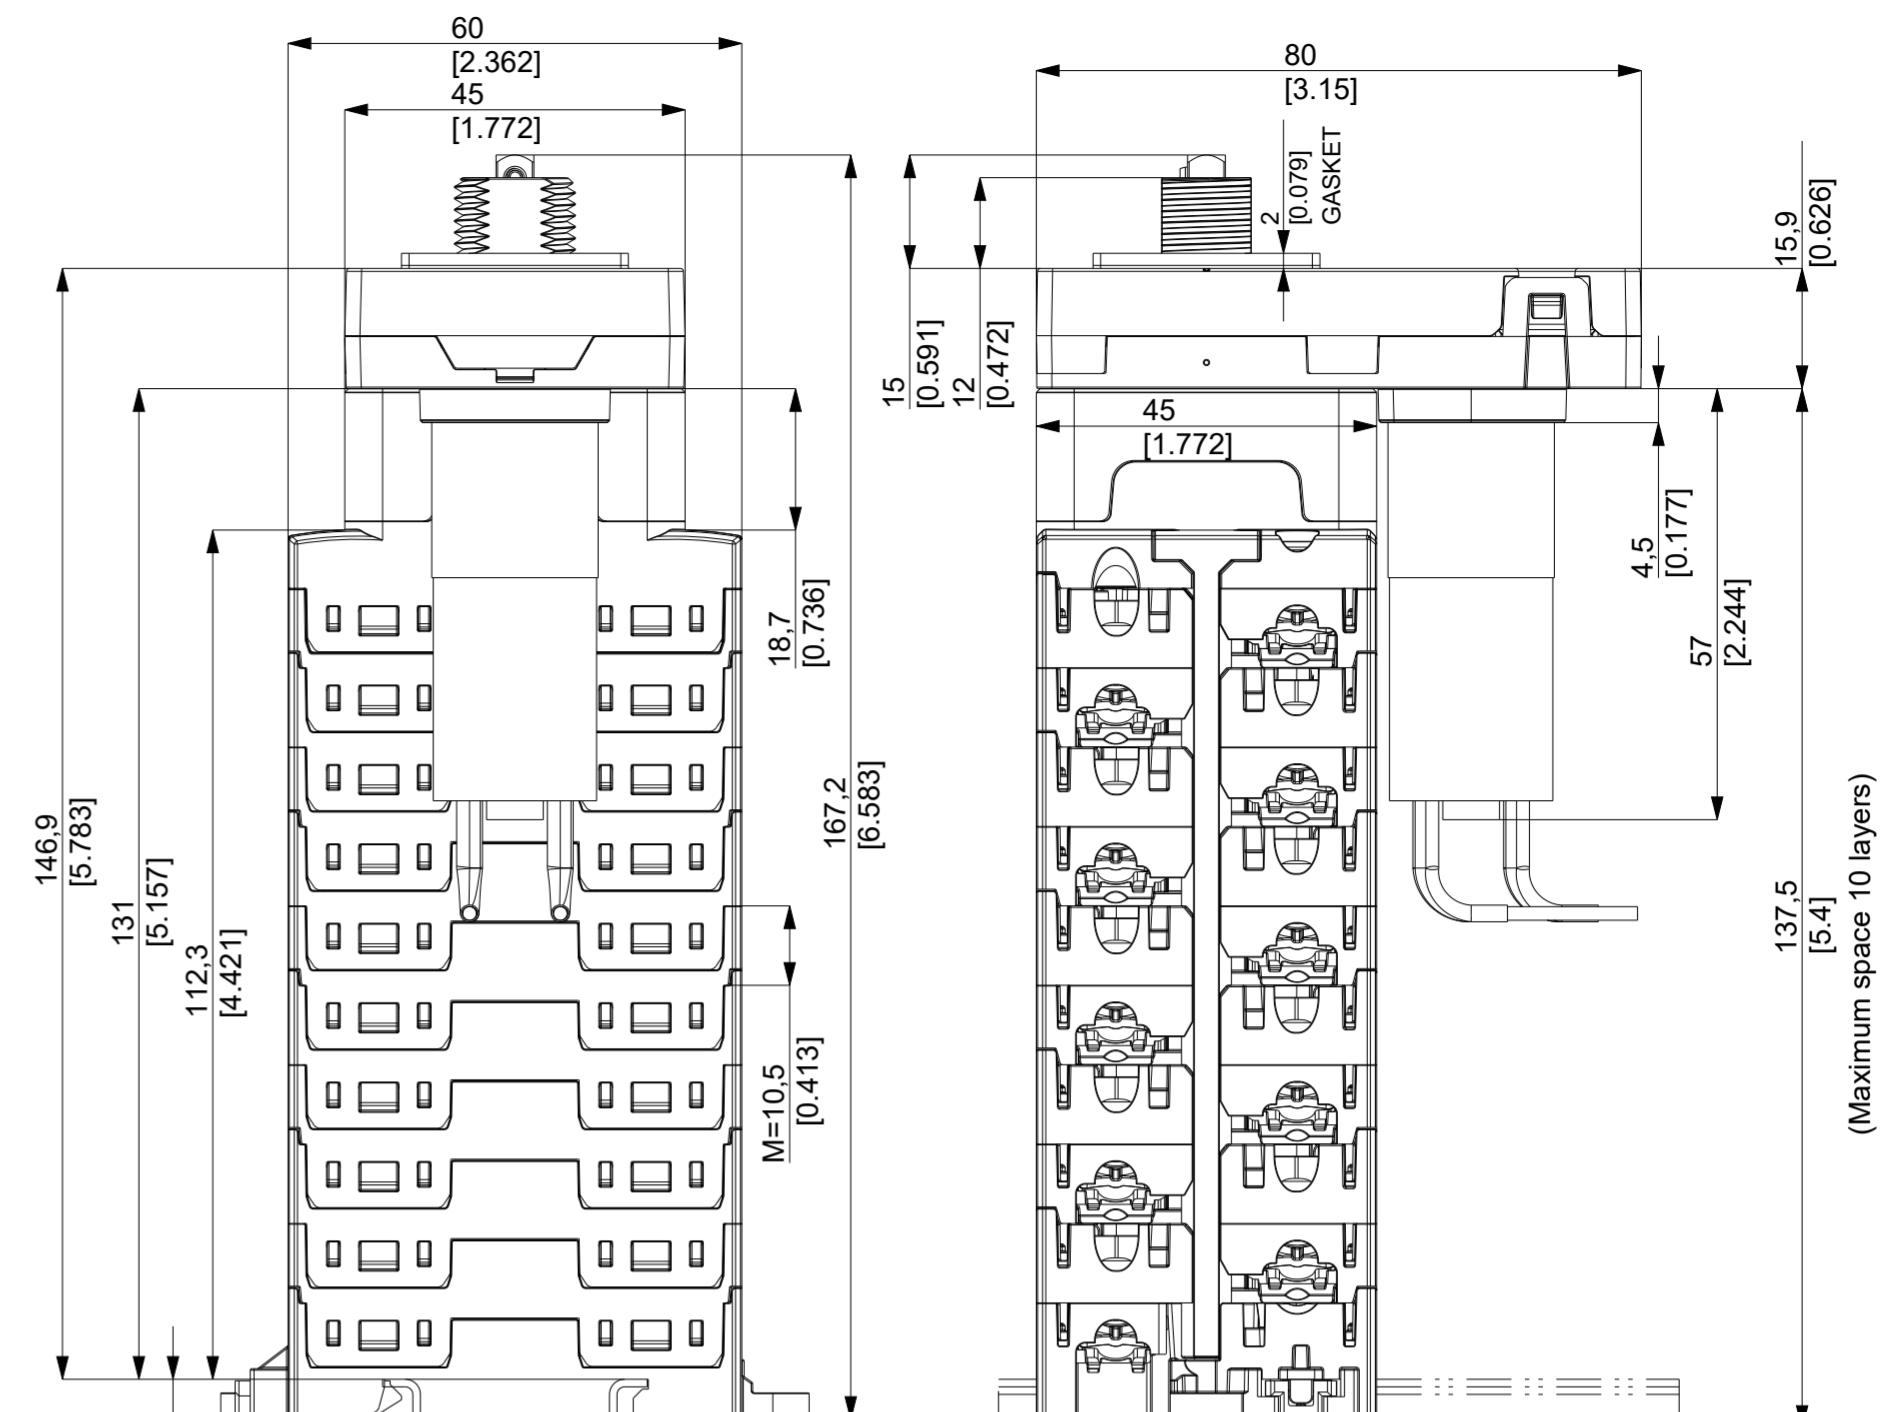


WIRE / CAVI		FORK TERMINALS TERMINALI A FORCHETTA	
FLEXIBLE FLESSIBILE	SOLID RIGIDO	10mm ²	16mm ²
mm ² = 2x6 AWG = 10	mm ² = 2x6 AWG = 10	mm ² = 1x10 AWG = 8	mm ² = 1x16 AWG = 6

TIGHTENING TORQUE = 1,7 Nm
COPPIA SERRAGGIO VITI

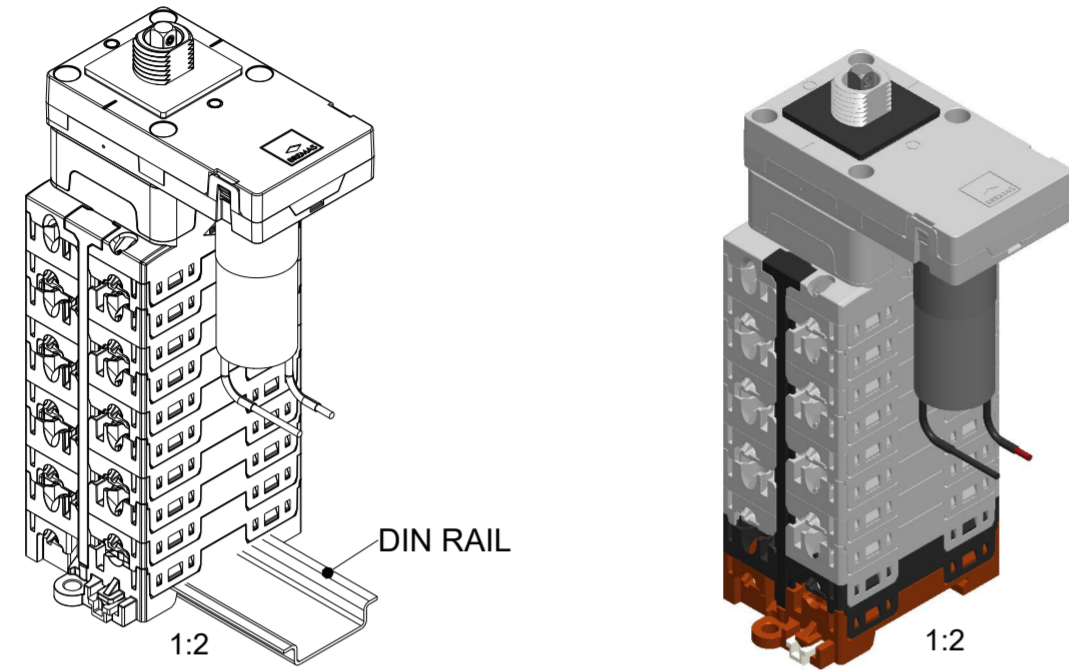

Dimension in mm in [inch] Dimensioni in mm in [pollici]

EDIZ./REL		MODIFICA / REVISION				DATA/DATE	SIGLA/SIGN
MATERIALE / MATERIAL: --		FINITURA / FINISHING: --					
Dis/Drv F. Civettini		Impiego Use	Scala Scale	Toll. Gen. Tol.	Sost./Rep.the		
Contr/Cxd: 07/10/2024		CM	1:1	Lineare/Linear: J512	Sost./dal/Rep.of		
Data/Date: Oct-07-24				Angoli/Angles: 30	Direttorio/Directory		
OGGETTO/OBJECT: DXU WITH MOTOR SIGNAL OFF-ON BASE/REAR MONT.M16,10 LAYERS						DESIGNO /DRAWING	EDIZ./REL
						CM_DXU10V_A_M16_SP15	1

QUESTO DISEGNO NON PUO' ESSERE RIPRODOTTO NE MOSTRATO A TERZE PERSONE ART.115-33 C.C.-289 C.P.

QUESTO DISEGNO NON PUO' ESSERE RIPRODOTTO NE MOSTRATO A TERZE PERSONE ART.115-33 C.C.-289 C.P.