


WIRE / CAVI		FORK TERMINALS TERMINALI A FORCHETTA	
FLEXIBLE FLESSIBILE	SOLID RIGIDO	10mm <sup>2</sup>	16mm <sup>2</sup>
mm <sup>2</sup> = 2x6 AWG = 10	mm <sup>2</sup> = 2x6 AWG = 10	mm <sup>2</sup> = 1x10 AWG = 8	mm <sup>2</sup> = 1x16 AWG = 6


TIGHTENING TORQUE = 1,7 Nm  
COPPIA SERRAGGIO VITI

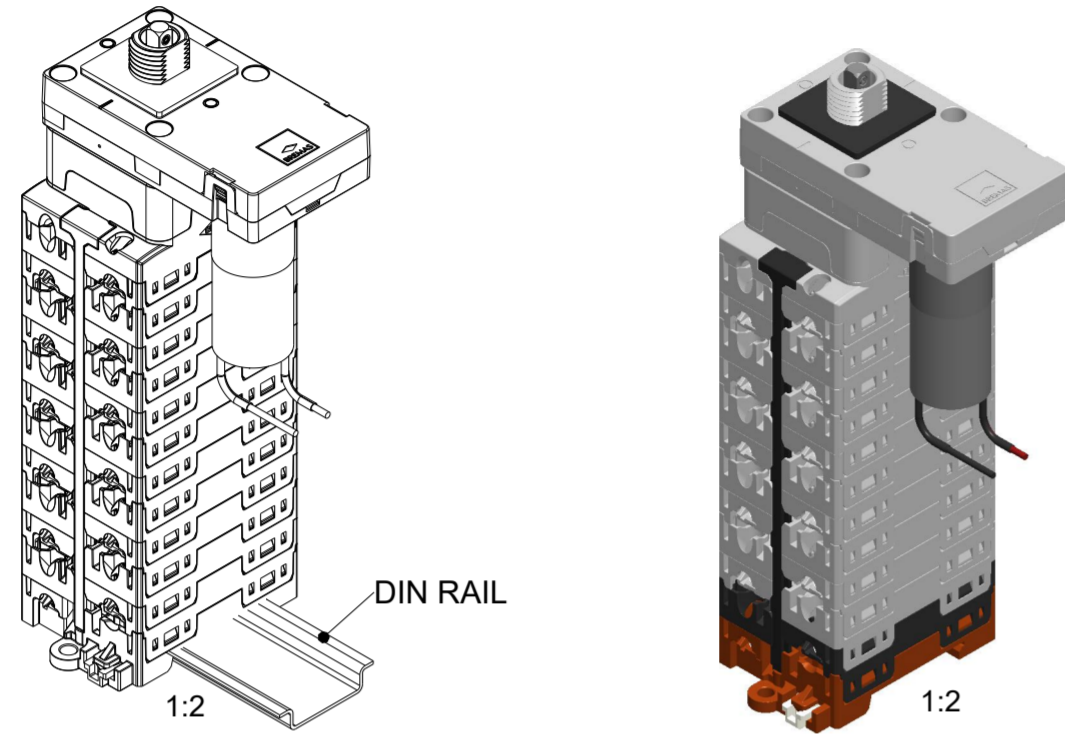


DIN RAIL

1:2

1:2

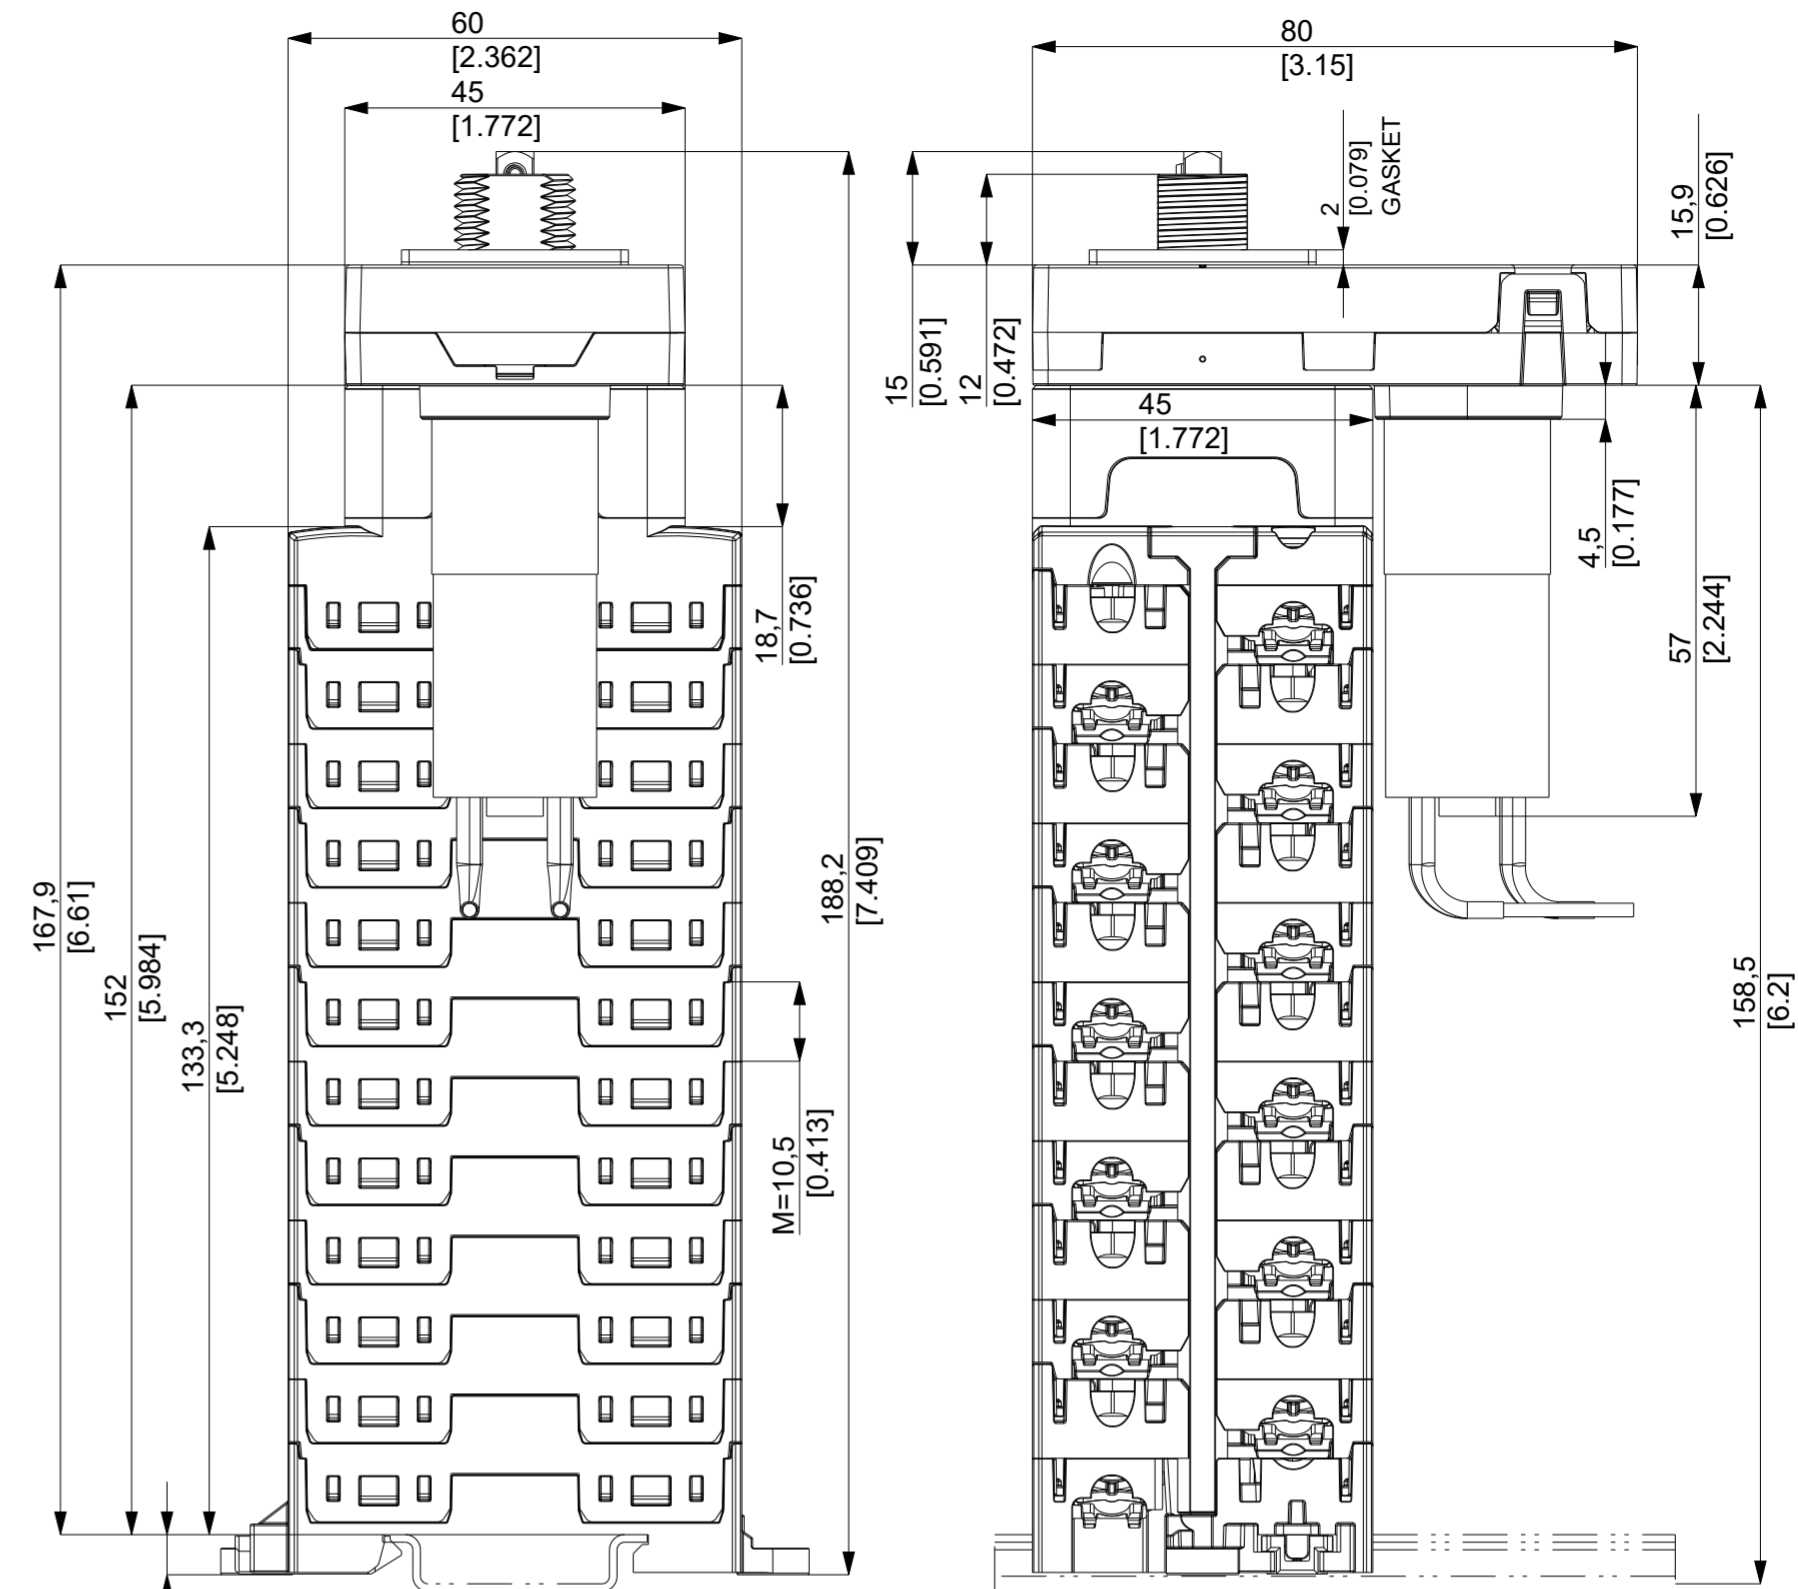


(Maximum space 12 layers)  
[6.2]

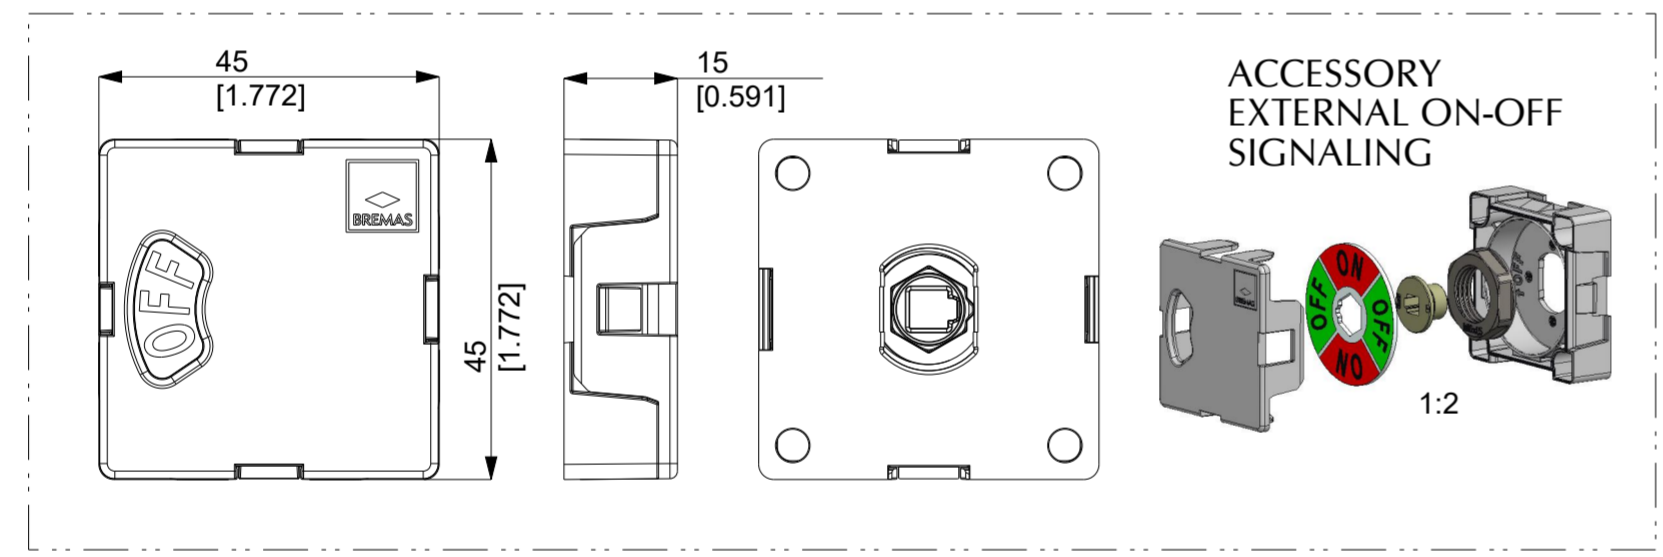

ACCESSORY  
EXTERNAL ON-OFF  
SIGNALING

1:2

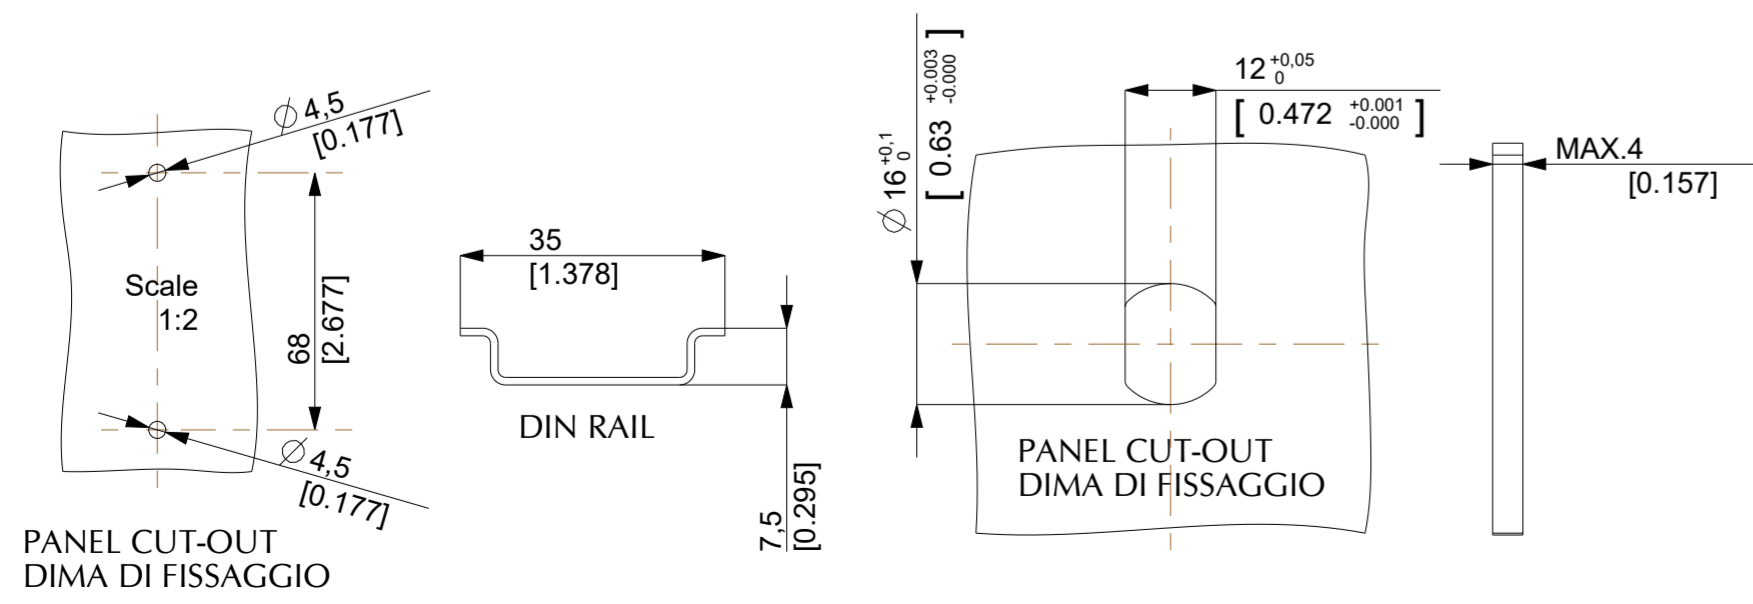

PANEL CUT-OUT  
DIMA DI FISSAGGIO

DIN RAIL

PANEL CUT-OUT  
DIMA DI FISSAGGIO

Dimension in mm in [inch]      Dimensioni in mm in [pollici]

EDIZ./REL		MODIFICA / REVISION				DATA/DATE	SIGLA/SIGN
MATERIALE / MATERIAL: --		FINITURA / FINISHING: --					
Dis/Drv F. Civettini	Impiego Use	Scala Scale	Toll. Gen. Tol.	Sost./Rep.the			
Contr/Cxd	CM+DXU	1:1	Lineare/Linear JS12	Sost./dal/Rep.of			
Data/Date: Oct-07-24			Angoli/Angles: 30	Directorio/Directory			
OGGETTO/OBJECT: DXU WITH MOTOR SIGNAL OFF-ON BASE/REAR MONT.M16,12 LAYERS					DESIGNO /DRAWING CM_DXU12V_A_M16_SP15		EDIZ./REL 1

QUESTO DISEGNO NON PUO' ESSERE RIPRODOTTO NE MOSTRATO A TERZE PERSONE ART.115-33 C.C.-283 C.P.