
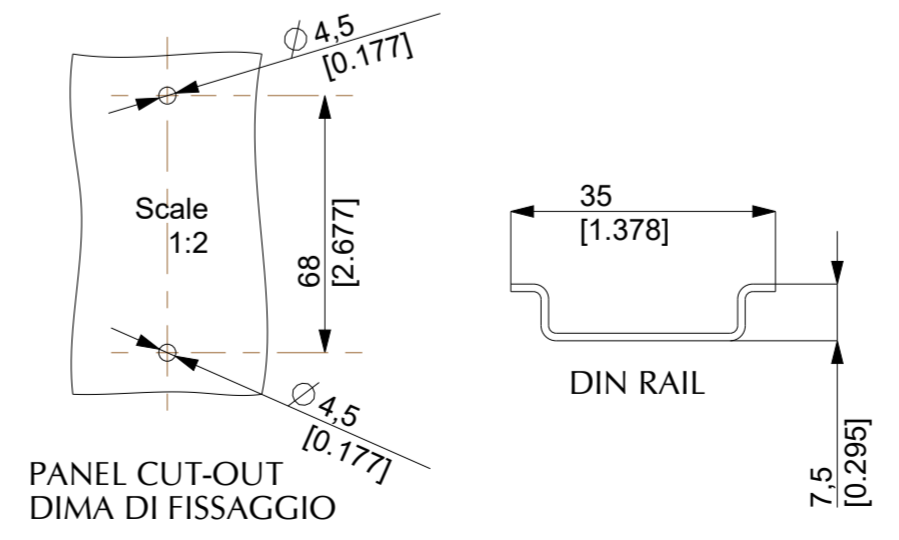
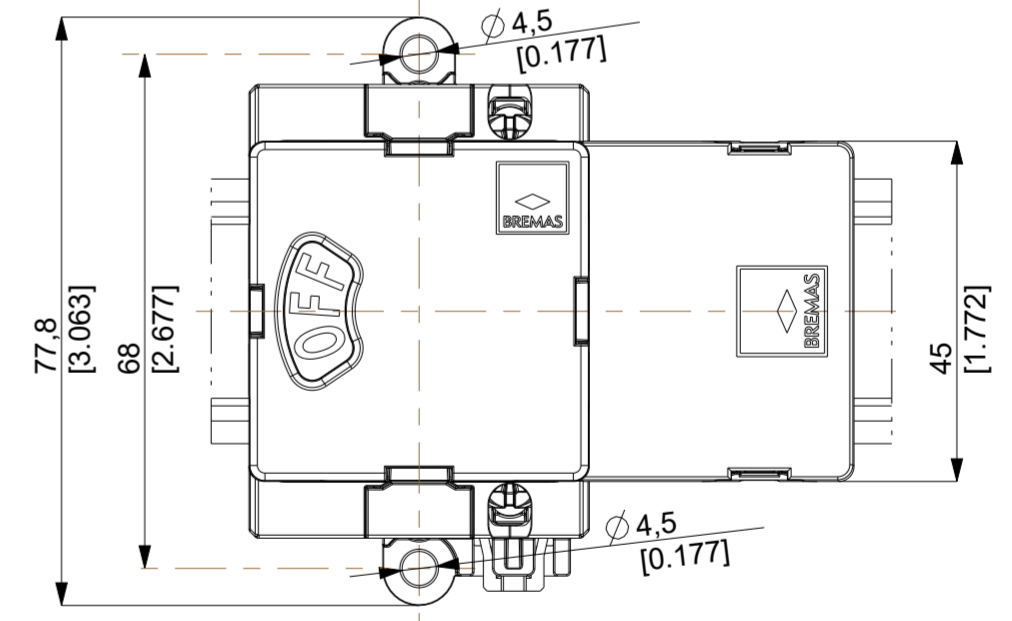
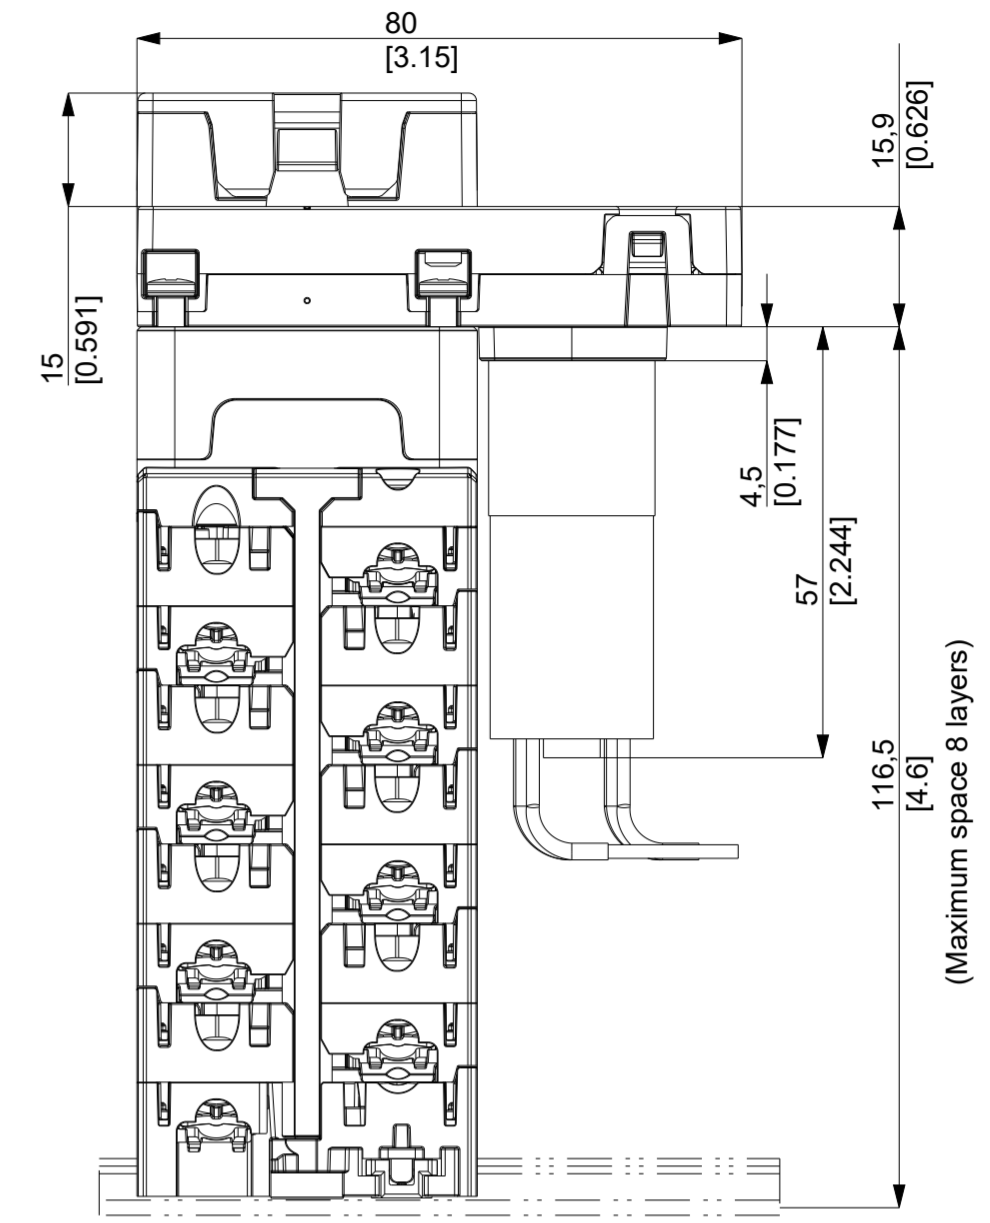
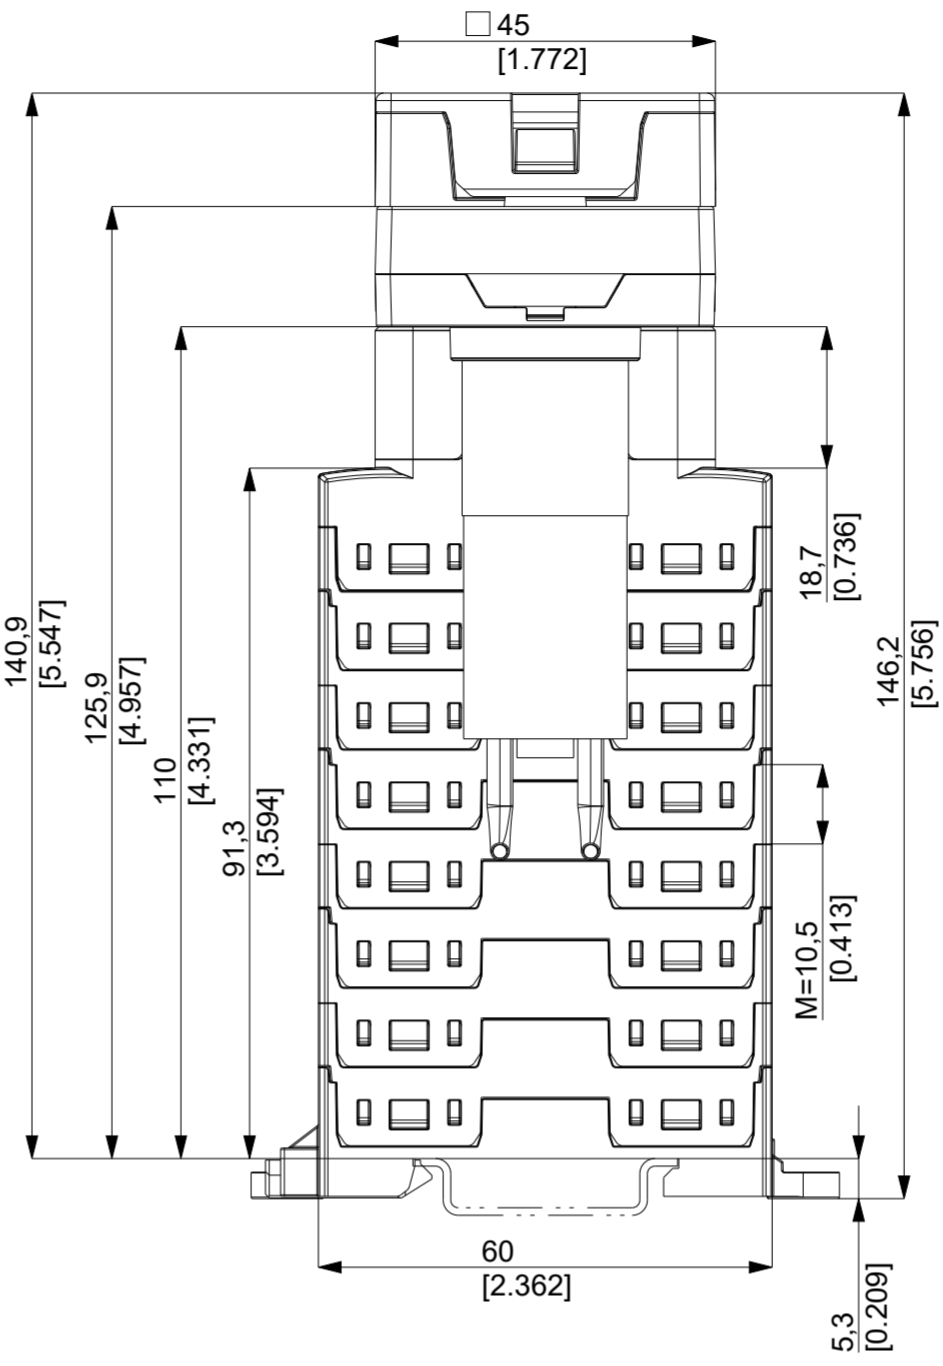
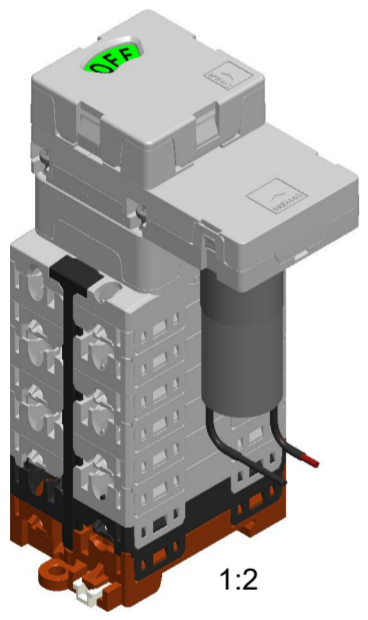


WIRE / CAVI		FORK TERMINALS TERMINALI A FORCHETTA	
FLEXIBLE FLESSIBILE	SOLID RIGIDO	10mm ²	16mm ²
mm ² = 2x6 AWG = 10	mm ² = 2x6 AWG = 10	mm ² = 1x10 AWG = 8	mm ² = 1x16 AWG = 6

TIGHTENING TORQUE = 1,7 Nm
COPPIA SERRAGGIO VITI

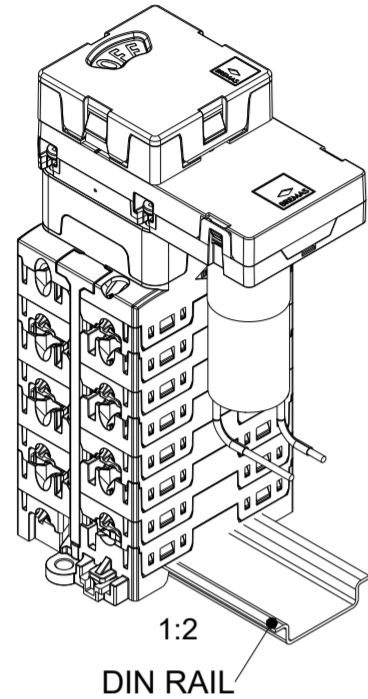

Dimension in mm in [inch] Dimensioni in mm in [pollici]

EDIZ./REL		MODIFICA / REVISION				DATA/DATE	SIGLA/SIGN
MATERIALE / MATERIAL: --		FINITURA / FINISHING: --					
Dis/Drw F. Civellini	Impiego Use	Scala Scale	Toll. Gen. Tol.	Sost./Rep.the			
Conti/Cxd	CM+DXU	1:1	Lineare/Linear Is12	Sost./dal/Rep.of			
Data/Date: Oct-07-24			Angoli/Angles: 30	Direttorio/Directory			
OGGETTO/OBJECT: DXU WITH MOTOR SIGNAL OFF-ON FIXING DDN - 3MPPT						DISEGNO / DRAWING CM_DXU8E_A_DSG	EDIZ./REL 1

QUESTO DISEGNO NON PUO' ESSERE RIPRODOTTO NE MOSTRATO A TERZE PERSONE ART.115-33 C.C.-283 C.P.